



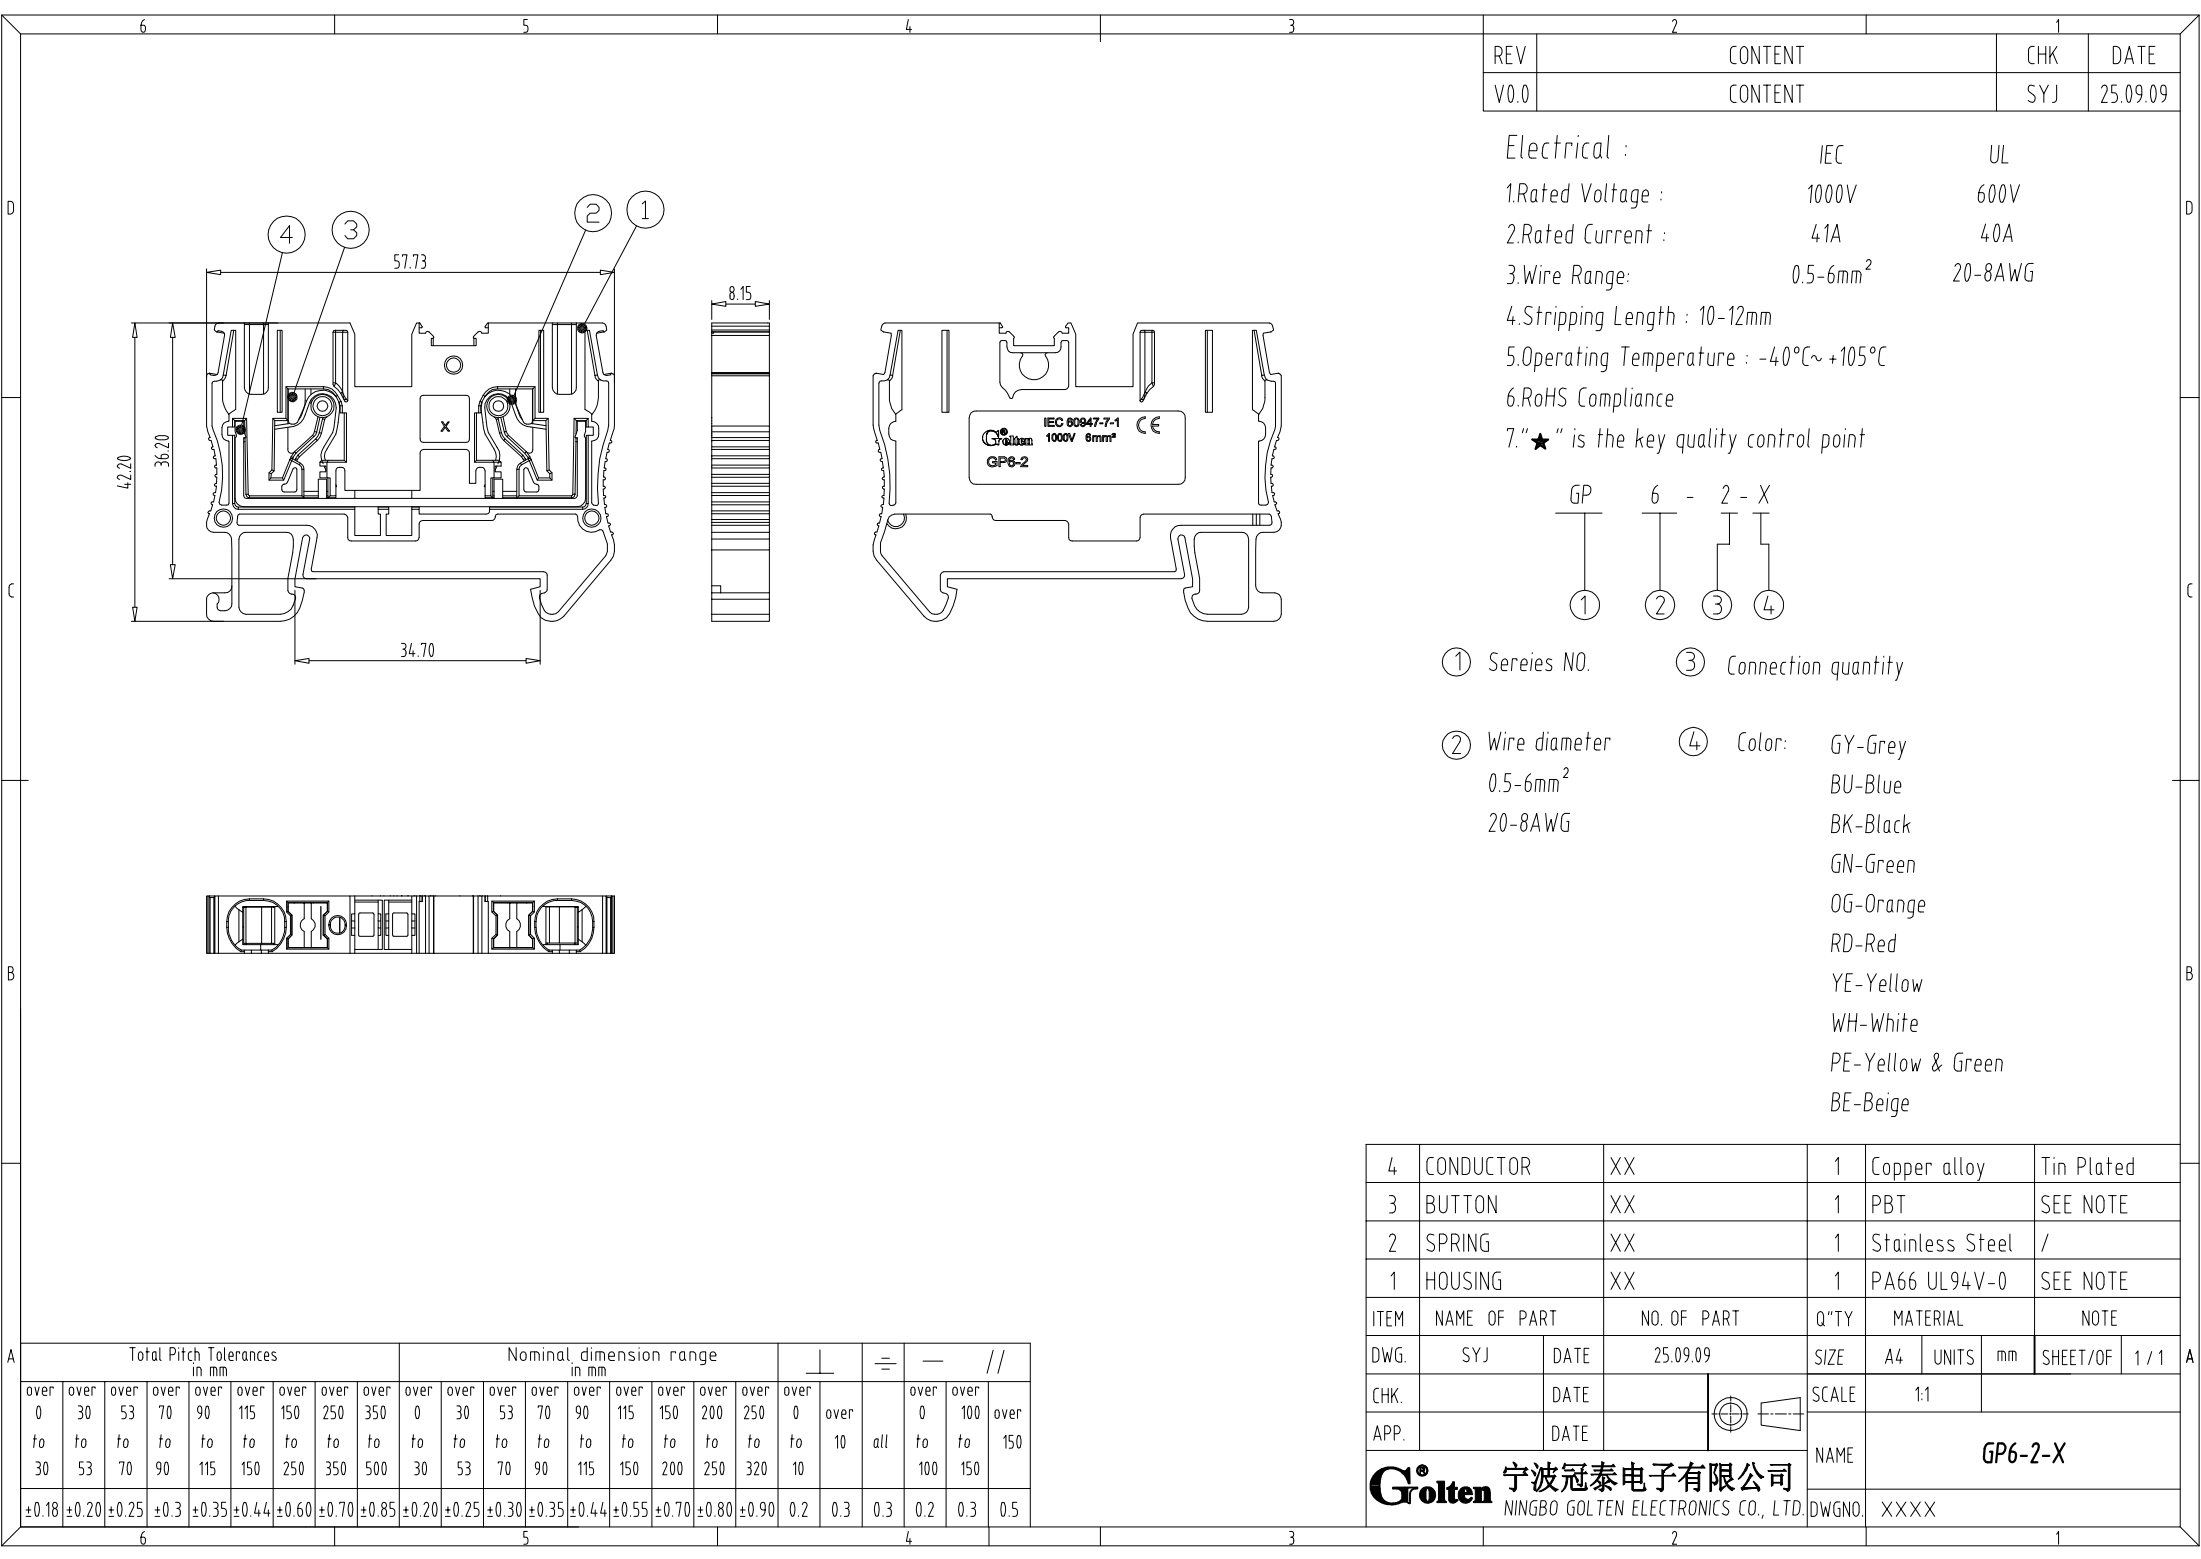

REV	CONTENT	CHK	DATE
V0.0	CONTENT	SYJ	25.09.09

Electrical :
1.Rated Voltage : 1000V
2.Rated Current : 41A
3.Wire Range: 0.5-6mm²
4.Stripping Length : 10-12mm
5.Operating Temperature : -40℃~+105℃
6.RoHS Compliance
7."★" is the key quality control point



① Sereies NO. ③ Connection quantity

② Wire diameter
0.5-6mm²
20-8AWG

④ Color: GY-Grey
BU-Blue
BK-Black
GN-Green
OG-Orange
RD-Red
YE-Yellow
WH-White
PE-Yellow & Green
BE-Beige

4	CONDUCTOR	XX	1	Copper alloy	Tin Plated
3	BUTTON	XX	1	PBT	SEE NOTE
2	SPRING	XX	1	Stainless Steel	/
1	HOUSING	XX	1	PA66 UL94V-0	SEE NOTE
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTE
DWG.	SYJ	DATE	25.09.09	SIZE	A4 UNITS mm SHEET/OF 1 / 1
CHK.		DATE		SCALE	1:1
APP.		DATE		NAME	GP6-2-X
				DWGNO.	XXXX

Grolten 宁波冠泰电子有限公司
NINGBO GOLTEN ELECTRONICS CO., LTD.