



Short Description:

Specification

Product Name: KN3(A)-102 ;KN3(A)-102A ;KN3(A)-112 ;KN3(A)-112A ; KN3(A)-103 ;KN3(A)-103A ; KN3(A)-113 ;KN3(A)-113A ; KN3(A)-123 ;KN3(A)-123A

Rating: ()10A 125VAC;6A 250VAC ; (A)15A 125VAC;10A 250VAC ; (AA)20A 125VAC;15A 250VAC

UL Rating:20A 125VAC;10A 125VAC;3/4HP 125/250VAC

Contact Resistance:50mΩ max

Insulation Resistance:500VDC 1000MΩ min

Dielectric Strength:1500VAC 1Minute


Operating Temperature:-25°C~+85°C

Electrical Life:10000 Cycles

Terminal options:


Screw Terminal ()	PC Terminal (P)	Hitch Terminal (H)	Solder Terminal (S)	Press Terminal (T)

Handle options:

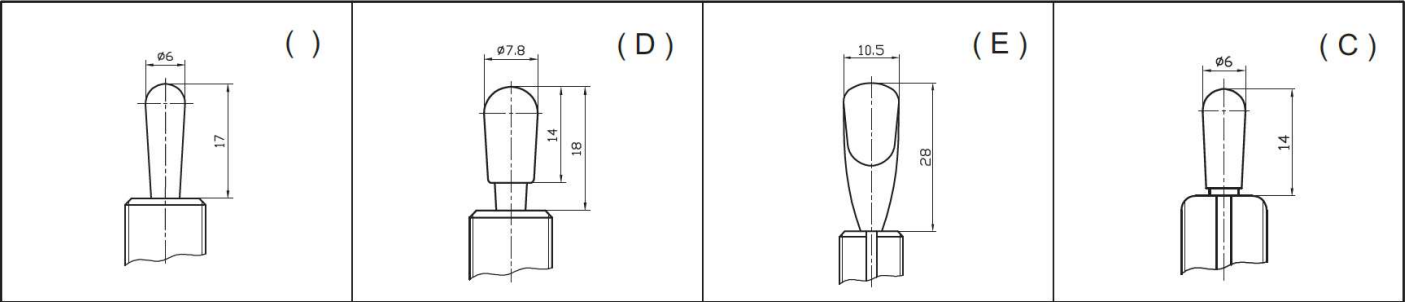


Base color and Material: HA

Nameplate options:

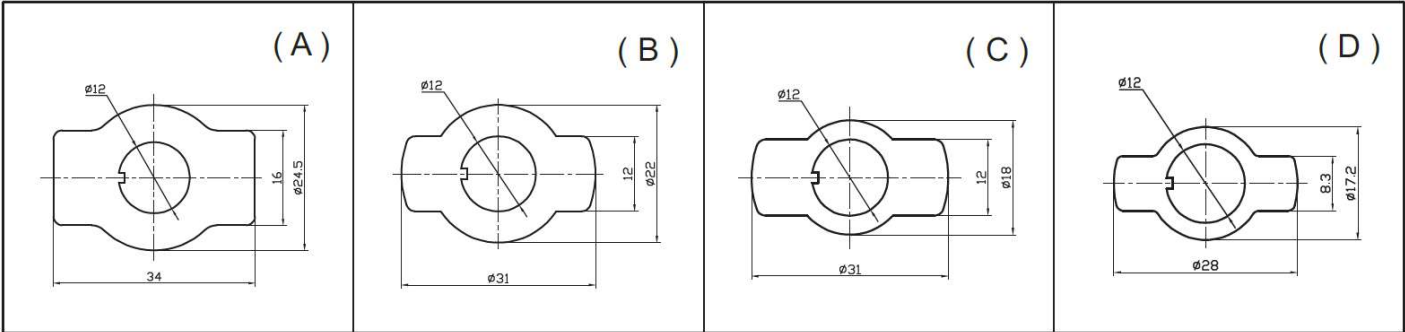

Water proof cap:

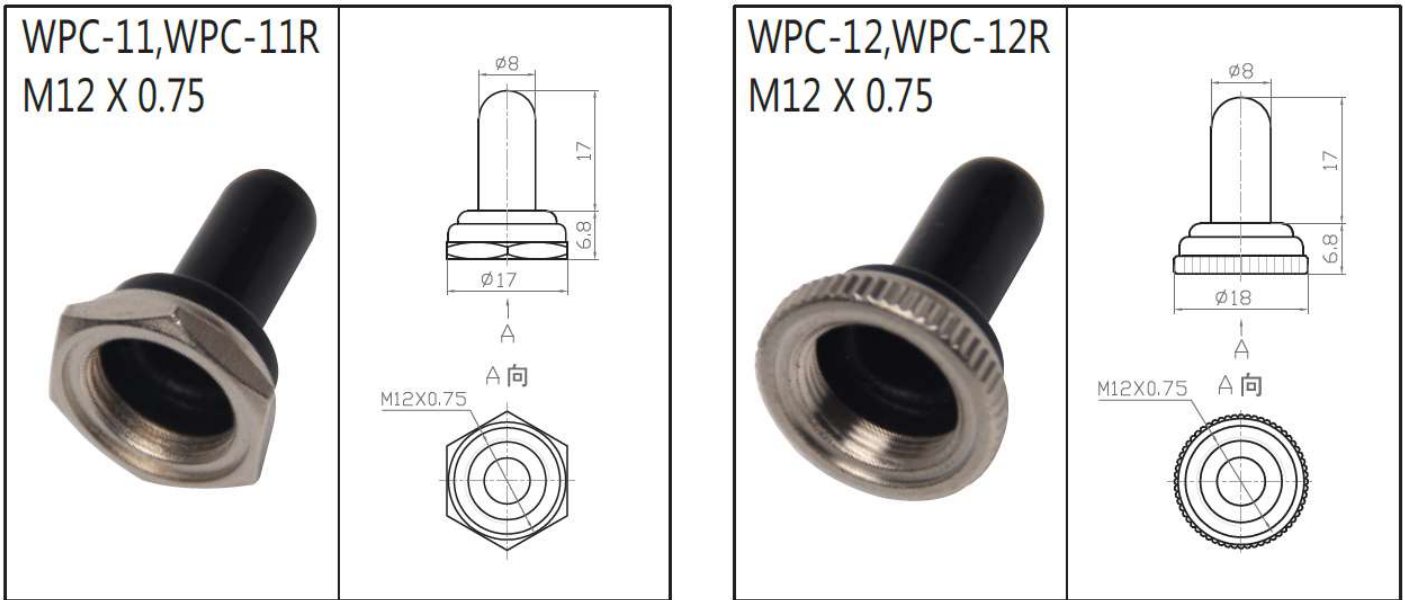

Circuitry trait:ON-ON;ON-(ON);ON-OFF-ON;ON-OFF-(ON);(ON)-OFF-(ON)

Switch pin:SPDT 3P

Certification system: TUV、UL、IOS9001:2015、CE、ENECandOther

Product details and dimensions

