



Specification

Product Name: KN3(B)-101 ;KN3(B)-101A

Rating: ()10A 125VAC;6A 250VAC ;(A)15A 125VAC;10A 250VAC ; (AA)20A 125VAC;15A 250VAC

Contact Resistance:50mΩ max

Insulation Resistance:500VDC 1000MΩ min

Dielectric Strength:1500VAC 1Minute

Operating Temperature:-25°C~+85°C

Electrical Life:10000 Cycles


Terminal options:

Screw Terminal ()	PC Terminal (P)	Hitch Terminal (H)	Solder Terminal (S)	Press Terminal (T)


Handle options:

()	(D)	(E)	(C)

Base color and Material: HA
Nameplate options:

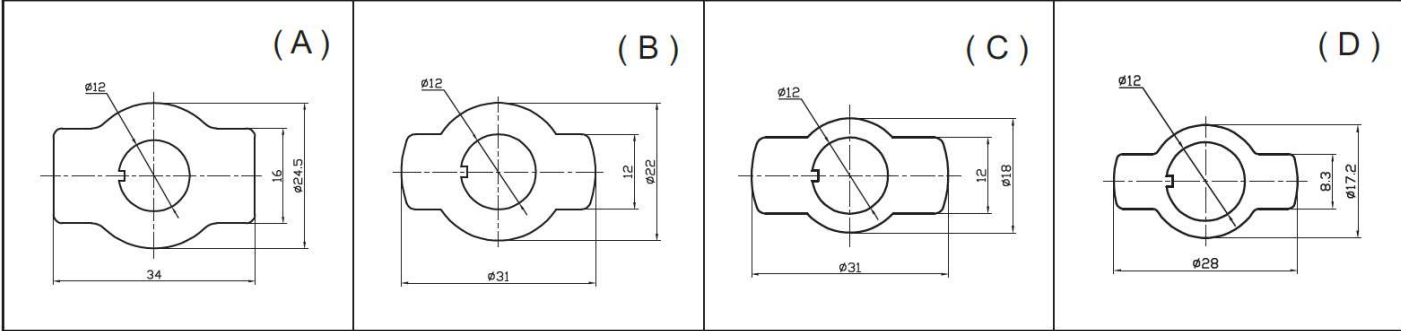

Water proof cap:

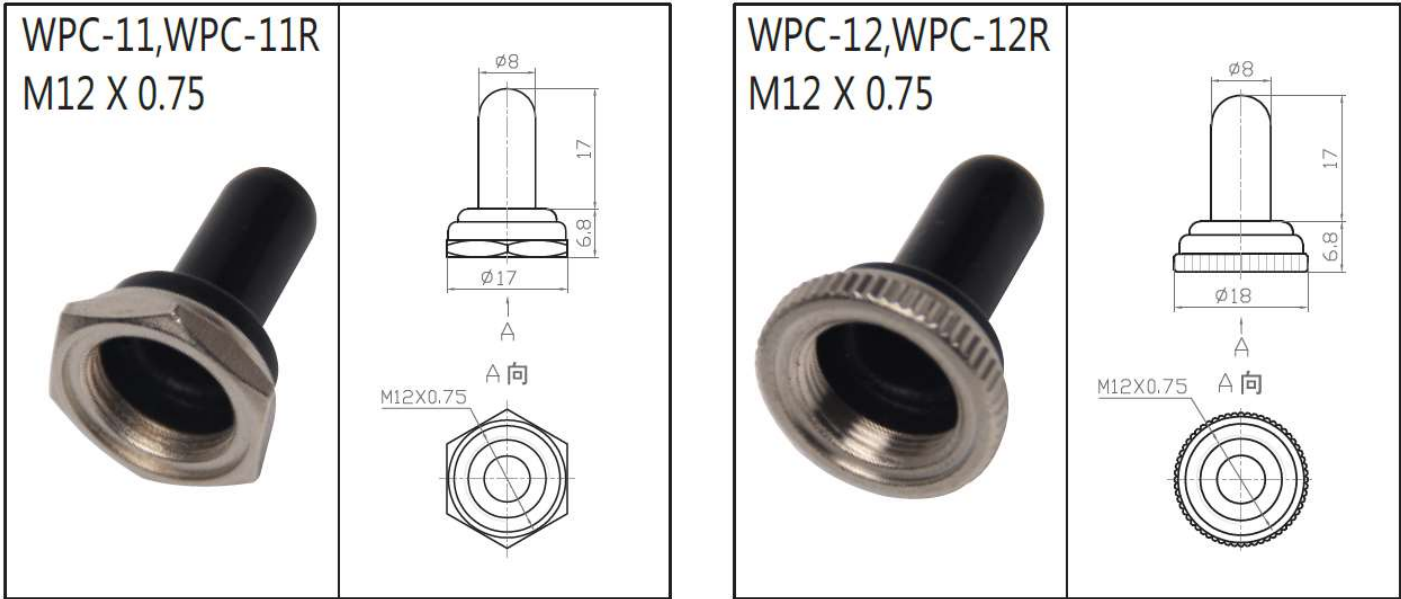

Circuitry trait:ON-ON;ON-(ON);ON-OFF-ON;ON-OFF-(ON);(ON)-OFF-(ON)
Switch pin:SPST 2P
Certification system: TUV、UL、IOS9001:2015、CE、ENECandOther

Product details and dimensions

