

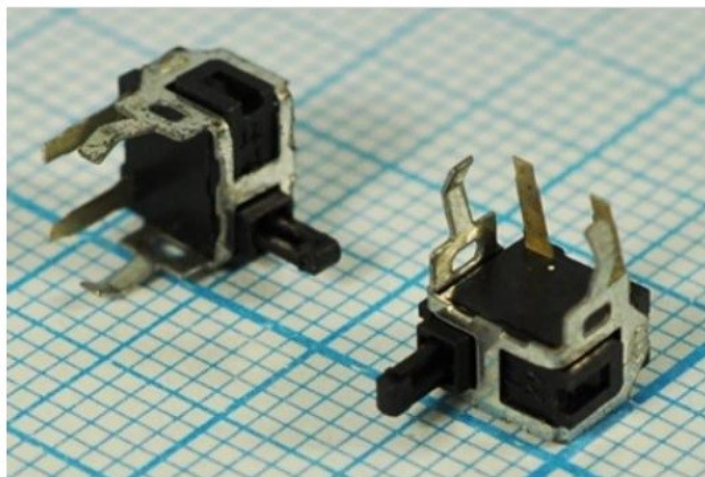
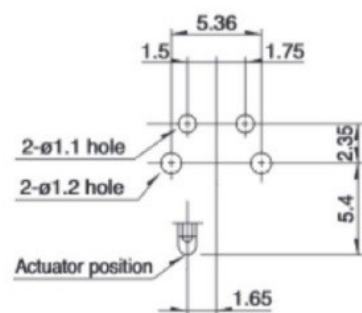
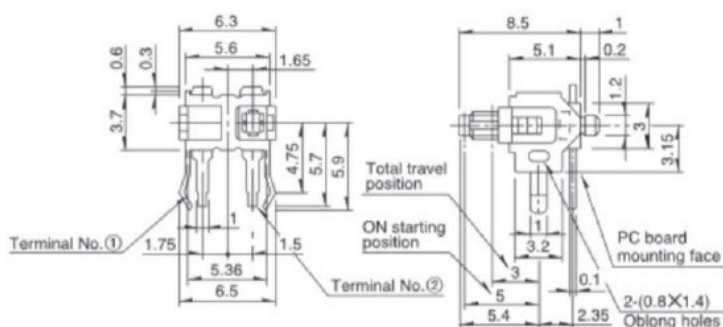


SPPB610400

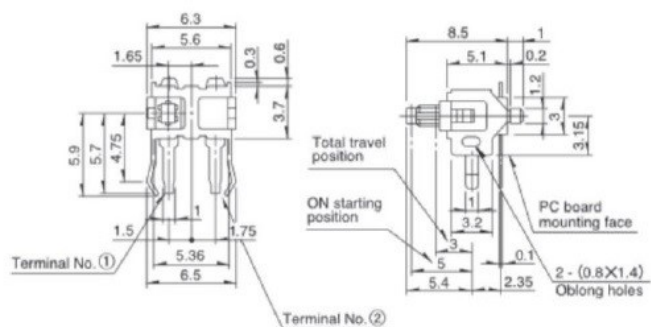

SPPB620300

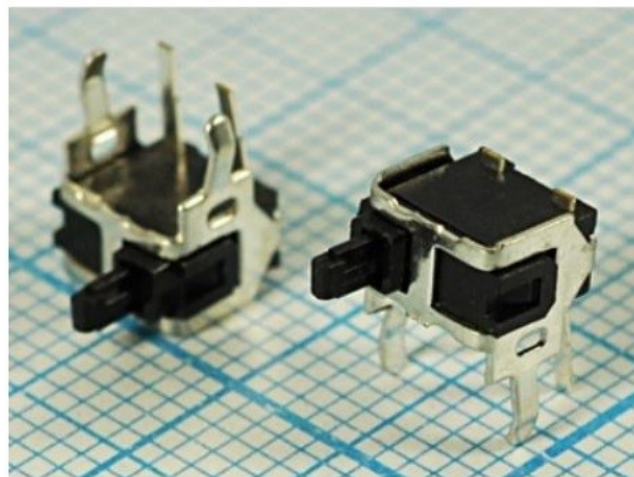

■ Typical Specifications

Items		Specifications
Rating (max.)/(min.) (Resistive load)		0.1A 30V DC / 50 μ A 3V DC
Contact resistance (Initial / After operating life)		1 Ω max. / 20 Ω max.
Operating force		0.35N max.
Operating life	Without load	50,000cycles
	With load	50,000cycles (0.1A 30V DC)

