TLV3801、TLV3802、TLV3811(C) 具有 LVDS 输出的 225ps 高速比较器

1 特性

- 低传播延迟：225 ps
- 低过驱动分散：5 ps
- 静态电流：17mA
- 高切换频率：3GHz/6Gbps
- 窄脉宽检测功能：240ps
- LVDS 输出
- 分离输入和输出接地基准
- 单电源电压：2.7V 至 5.25V
- 低输入失调电压：±0.5mV
- 内部 2mV 迟滞：TLV380x
- 内部 1.1mV 迟滞：TLV3811
- 内部 0mV 迟滞：TLV3811C
- 封装：TLV3801（8 引脚 WSON）、TLV3811(C)（6 引脚 DSBGA）、TLV3802（12 引脚 WSON）

2 应用

- 激光雷达中的距离感测
- 飞行时间传感器
- 示波器和逻辑分析仪中的高速触发器功能
- 高速差分线路接收器
- 无人机视觉

3 说明

TLV380x/TLV3811(C) 是具有宽电源电压范围和 3GHz 超高切换频率的 225ps 高速比较器。这些器件具有 2.7V 至 5.25V 的单电源工作电压范围和 2.7V 至 5.25V 的双电源工作电压范围，采用业界通用的小型封装承载所有特性，是激光雷达、差分线路接收器应用以及测试和测量系统的理想选择。

TLV380x/TLV3811(C) 具有 5ps 的强大输入过驱性能，并且能够检测仅 240ps 的窄脉冲宽度。这些器件具有输入过驱可实现较小传播延迟变化，并且能够检测窄脉冲，是飞行时间 (ToF) 应用（例如工厂自动化和无人机视觉）的理想选择。

TLV380x/TLV3811(C) 的低压差分信号 (LVDS) 输出有助于提高数据吞吐量并优化功耗。同样，互补输出有助于通过抑制每个输出上的共模噪声来降低 EMI。LVDS 输出旨在驱动和直接连接可接受标准 LVDS 输入（例如大多数 FPGA 和 CPU）的其他应用下游器件。

TLV3801 和 TLV3802 分别采用 8 引脚 WSON 和 12 引脚 WSON 封装，而 TLV3811(C) 采用微型 6 引脚 DSBGA 封装，均非常适合空间敏感型应用，例如光学传感器模块。

器件信息

器件型号	封装 (1)	封装尺寸（标称值）
TLV3801	WSON (8)	2.00mm × 2.00mm
TLV3811(C)	DSBGA (6)	1.218mm × 0.818mm
TLV3802	WSON (12)	3.00mm × 2.00mm

1.如需了解所有可订购封装，请参阅数据表末尾的可订购产品附录。

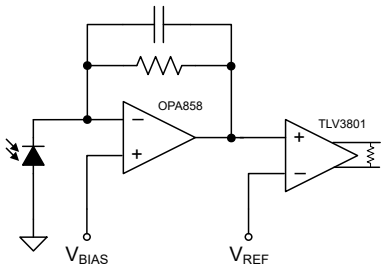

TLV3801 光学接收器电路

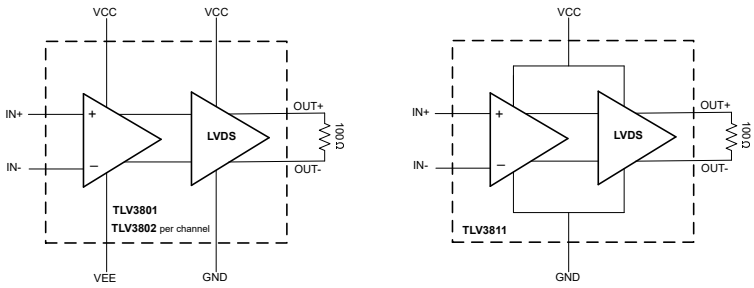

功能方框图

本资源的原文使用英文撰写。 为方便起见，TI 提供了译文；由于翻译过程中可能使用了自动化工具，TI 不保证译文的准确性。 为确认准确性，请务必访问 ti.com 参考最新的英文版本（控制文档）。

Table of Contents

1 特性 1
2 应用 1
3 说明 1
4 Revision History 2
5 Pin Configuration and Functions 3
6 Specifications 5
6.1 Absolute Maximum Ratings 5
6.2 ESD Ratings 5
6.3 Thermal Information 5
6.4 Recommended Operating Conditions 5
6.5 Electrical Characteristics 7
6.6 Timing Diagrams 9
6.7 Typical Characteristics 10
7 Detailed Description 14
7.1 Overview 14
7.2 Functional Block Diagram 14
7.3 Feature Description 14
7.4 Device Functional Modes 14
8 Application and Implementation 16
8.1 Application Information 16
8.2 Typical Application 16
8.3 Power Supply Recommendations 21
8.4 Layout 22
9 Device and Documentation Support 23
9.1 Device Support 23
9.2 接收文档更新通知 23
9.3 支持资源 23
9.4 Trademarks 23
9.5 静电放电警告 23
9.6 术语表 23
10 Mechanical, Packaging, and Orderable Information 23

4 Revision History

注：以前版本的页码可能与当前版本的页码不同

Changes from Revision B (March 2023) to Revision C (November 2023) **Page**

- 将 TLV3802 的预发布更改为 RTM 版本 1

Changes from Revision A (October 2022) to Revision B (March 2023) **Page**

- 在整个数据表中添加了 TLV3811(C) 和 TLV3802 (初始) 1

Changes from Revision * (December 2021) to Revision A (October 2022) **Page**

Copyright © 2023 Texas Instruments Incorporated

5 Pin Configuration and Functions



图 5-1. WSON Package
8-Pin DSG
Top View

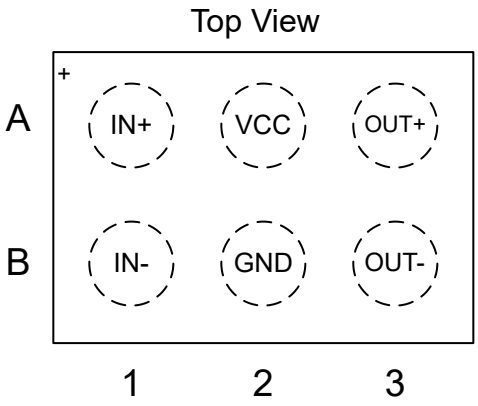

图 5-2. DSBGA Package
6-Pin YBG
Top View

表 5-1. Pin Functions

PIN			I/O	DESCRIPTION
NAME	TLV3801	TLV3811(C)		
IN+	5	A1	I	Non-inverting input
IN –	4	B1	I	Inverting input
OUT+	8	A3	O	Non-inverting output
OUT –	1	B3	O	Inverting output
V_{EE}	3	-	I	Negative power supply (If using single supply, connect to GND)
V_{CC}	6, 7	A2	I	Positive power supply
GND	2	B2	I	Ground

Copyright © 2023 Texas Instruments Incorporated

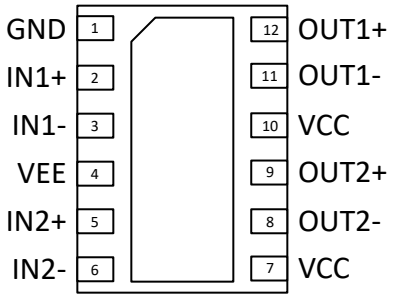

图 5-3. WSON Package
12-Pin DSS
Top View

表 5-2. Pin Functions

PIN		I/O	DESCRIPTION
NAME	TLV3802		
GND	1	I	Ground
IN1+	2	I	Channel 1 Non-inverting input
IN1 –	3	I	Channel 1 Inverting input
VEE	4	I	Negative power supply (If using single supply, connect to GND)
IN2+	5	I	Channel 2 Non-inverting input
IN2 –	6	I	Channel 2 Inverting input
VCC	7	I	Positive power supply
OUT2 –	8	O	Channel 2 Inverting output
OUT2+	9	O	Channel 2 Non-inverting output
VCC	10	I	Positive power supply
OUT1 –	11	O	Channel 1 Inverting output
OUT1+	12	O	Channel 1 Non-inverting output
Thermal Pad	–	–	Connect directly to VEE

Copyright © 2023 Texas Instruments Incorporated

6 Specifications

6.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)(1)

	MIN	MAX	UNIT
Supply voltage: (V_{CC} – V_{EE}) and (V_{CC} – GND) (2)	– 0.3	5.5	V
Input pins (IN+, IN –) from V_{EE} (WSON) (3)	V_{EE} – 0.3	V_{CC} + 0.3	V
Input pins (IN+, IN –) from GND (DSBGA) (4)	GND – 0.3	V_{CC} + 0.3	V
Current into input pins (IN+, IN –)	– 10	10	mA
Output (OUT+, OUT –)	GND	V_{CC}	V
Current into output pins (OUT+, OUT –)		10	mA
Junction temperature, T_J		150	°C
Storage temperature, T_{stg}	– 65	150	°C

(1) Operation outside the Absolute Maximum Ratings may cause permanent device damage. Absolute Maximum Ratings do not imply functional operation of the device at these or any other conditions beyond those listed under Recommended Operating Conditions. If used outside the Recommended Operating Conditions but within the Absolute Maximum Ratings, the device may not be fully functional, and this may affect device reliability, functionality, performance, and shorten the device lifetime.
(2) VEE less than or equal to GND
(3) Input terminals are diode-clamped to V_{EE} and V_{CC}
(4) Input terminals are diode-clamped to GND and V_{CC}

6.2 ESD Ratings

			VALUE	UNIT
$V_{(ESD)}$	Electrostatic discharge	Human-body model (HBM), per ANSI/ESDA/JEDEC JS-001(1)	±2000	V
		Charged-device model (CDM), per ANSI/ESDA/JEDEC JS-002(2)	±1000	

(1) JEDEC document JEP155 states that 500 V HBM allows safe manufacturing with a standard ESD control process.
(2) JEDEC document JEP157 states that 250 V CDM allows safe manufacturing with a standard ESD control process.

6.3 Thermal Information

THERMAL METRIC (1)		TLV3801 DSG (WSON) 8 PINS	TLV3811(C) YBG (DSBGA) 6 PINS	TLV3802 DSS (WSON) 12 PINS	UNIT
R_{qJA}	Junction-to-ambient thermal resistance	69.4	132.1	63.2	°C/W
$R_{qJC(top)}$	Junction-to-case (top) thermal resistance	95.7	1.4	61.9	°C/W
R_{qJB}	Junction-to-board thermal resistance	36.2	41	30.7	°C/W
y_{JT}	Junction-to-top characterization parameter	3.5	0.3	2.4	°C/W
y_{JB}	Junction-to-board characterization parameter	36.0	41	30.7	°C/W
$R_{qJC(bot)}$	Junction-to-case (bottom) thermal resistance	9.4	n/a	8.7	°C/W

(1) For more information about traditional and new thermal metrics, see the Semiconductor and IC Package Thermal Metrics report.

6.4 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

	MIN	MAX	UNIT
Single supply operation: V_{CC} – V_{EE} with V_{EE} = GND	2.7	5.25	V
Split supply operation: V_{CC} – V_{EE} with V_{EE} < GND (WSON)	2.7	5.25	V
Split supply operation: V_{CC} – GND with V_{EE} < GND (WSON)	2.4	5.25	V
Input voltage range (WSON)	V_{EE} + 1.5	V_{CC} + 0.1	V
Input voltage range (DSBGA)	GND + 1.5	V_{CC} + 0.1	V
Differential Input voltage range	– 1.5	+1.5	V

Copyright © 2023 Texas Instruments Incorporated

6.4 Recommended Operating Conditions（续）

over operating free-air temperature range (unless otherwise noted)

	MIN	MAX	UNIT
Ambient temperature, T_A	–40	125	°C

Copyright © 2023 Texas Instruments Incorporated

6.5 Electrical Characteristics

For V_{CC} = 3.3 V, V_{EE} = GND = 0, V_{CM} = 2.5 V at T_A = 25°C (Unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
DC Input Characteristics						
V_{OS}	Input offset voltage	T_A = –40°C to +125°C	–5(1)	±0.5	+5(1)	mV
V_{HYS}	Input hysteresis voltage	TLV3801, TLV3802		2		mV
V_{HYS} (DSBGA)	Input hysteresis voltage	TLV3811		1.1		mV
	Input hysteresis voltage	TLV3811C		0		mV
$V_{CM-Range}$	Common-mode voltage range	Single Supply: V_{EE} = GND V_{CC} – V_{EE} = 2.7 V to 5.25 V T_A = –40 °C to +125°C	V_{EE} + 1.5		V_{CC}	V
$V_{CM-Range}$ (WSON)	Common-mode voltage range	Split Supply: V_{EE} < GND V_{CC} – V_{EE} = 2.7 V to 5.25 V and V_{CC} – GND = 2.4 V to 5.25 V T_A = –40 °C to +125°C	V_{EE} + 1.5		V_{CC}	V
CMRR (WSON)	Common mode rejection ratio	V_{CM} = V_{EE} + 1.5V to V_{CC}		80		dB
CMRR (DSBGA)	Common mode rejection ratio	V_{CM} = GND + 1.5V to V_{CC}		80		dB
PSRR	Power supply rejection ratio	Single Supply: V_{EE} = GND V_{CC} – V_{EE} = 2.7 V to 5.25 V		80		dB
PSRR (WSON)	Power supply rejection ratio	Split Supply: V_{EE} < GND V_{CC} – V_{EE} = 2.7 V to 5.25 V and V_{CC} – GND = 2.4 V to 5.25 V		80		dB
I_B	Input bias current	T_A = –40 °C to +125 °C	–10	2	10	µA
I_{OS}	Input offset current	T_A = –40 °C to +125 °C	–4	±0.1	4	µA
C_{IC}	Input capacitance, common mode			1		pF
DC Output Characteristics						
V_{OCM}	Output common mode voltage	V_{CC} - GND ⩾ 2.6 V T_A = –40℃ to +125℃	1.125	1.25	1.375	V
	Output common mode voltage	V_{CC} - GND < 2.6 V T_A = –40℃ to +125℃	0.92	1.2	1.29	V
ΔV_{OCM}	Output common mode voltage mismatch	T_A = –40℃ to +125℃	–30		30	mV
V_{OCM_PP}	Peak-to-Peak output common mode voltage			50		mVpp
V_{OD}	Differential output voltage (WSON)	T_A = –40℃ to +125℃	250	350	450	mV
V_{OD}	Differential output voltage (DSBGA)	T_A = –40℃ to +125℃	240	350	450	mV
ΔV_{OD}	Differential output voltage mismatch	T_A = –40℃ to +125℃	-30		30	mV
Power Supply						
I_Q (TLV3801)	Quiescent current per comparator	T_A = –40°C to +125°C		20	26.6	mA

Copyright © 2023 Texas Instruments Incorporated

6.5 Electrical Characteristics（续）

For V_{CC} = 3.3 V, V_{EE} = GND = 0, V_{CM} = 2.5 V at T_A = 25°C (Unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
I_Q (TLV3811(C))	Quiescent current per comparator	T_A = –40°C to +125°C		17	23	mA
I_Q (TLV3802)	Quiescent current per comparator	T_A = –40°C to +125°C		19	23.5	mA
AC Characteristics						
t_{PD}	Propagation delay	$V_{OVERDRIVE}$ = 50 mV, $V_{UNDERDRIVE}$ = 50 mV, 50 MHz Squarewave		225		ps
Tempco of t_{PD}	Temperature Coefficient of propagation delay			±0.2		ps/℃
t_{PD_SKEW}	Propagation delay skew	$V_{OVERDRIVE}$ = 50mV, $V_{UNDERDRIVE}$ = 50 mV, 50 MHz Squarewave		±2.5		ps
Δt_{PD} (TLV3802 only)	Channel-to-channel propagation delay skew	$V_{OVERDRIVE}$ = $V_{UNDERDRIVE}$ = 50mV, 50 MHz Squarewave		6		ps
$t_{CM_DISPERSION}$	Common mode dispersion	V_{CM} varied from V_{CM} (min) to V_{CM} (max)		2		ps
$t_{OD_DISPERSION}$	Overdrive dispersion	Overdrive varied from 20 mV to 100 mV		5		ps
$t_{OD_DISPERSION}$	Overdrive dispersion	Overdrive varied from 10 mV to 1 V		15		ps
$t_{UD_DISPERSION}$	Underdrive dispersion	Underdrive varied from 20 mV to 100 mV		7		ps
$t_{UD_DISPERSION}$	Underdrive dispersion	Underdrive varied from 10 mV to 1 V		10		ps
t_R	Rise time	20% to 80%		135		ps
t_F	Fall time	80% to 20%		135		ps
f_{TOGGLE}	Input toggle frequency	V_{IN} = 200 mV_{PP} Sine Wave, V_{OD} = 550 mV		2.3		GHz
f_{TOGGLE}	Input toggle frequency	V_{IN} = 200 mV_{PP} Sine Wave, 50% Output swing		3		GHz
TR	Toggle Rate	V_{IN} = 200 mV_{PP} Sine Wave, V_{OD} = 550 mV		4.6		Gbps
TR	Toggle Rate	V_{IN} = 200 mV_{PP} Sine Wave, 50% Output swing		6		Gbps
PulseWidth	Minimum allowed input pulse width	$V_{OVERDRIVE}$ = $V_{UNDERDRIVE}$ = 50mV PW_{OUT} = 90% of PW_{IN}		240		ps

(1) Ensured by charaterization

Copyright © 2023 Texas Instruments Incorporated

6.6 Timing Diagrams

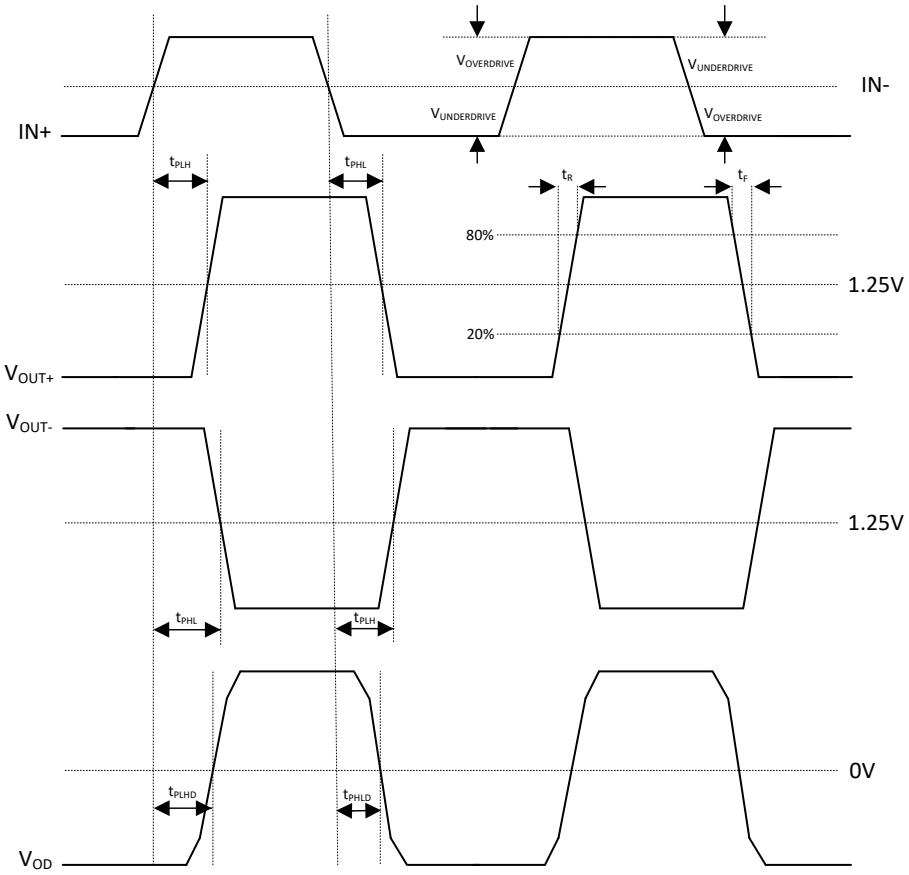

图 6-1. General Timing Diagram

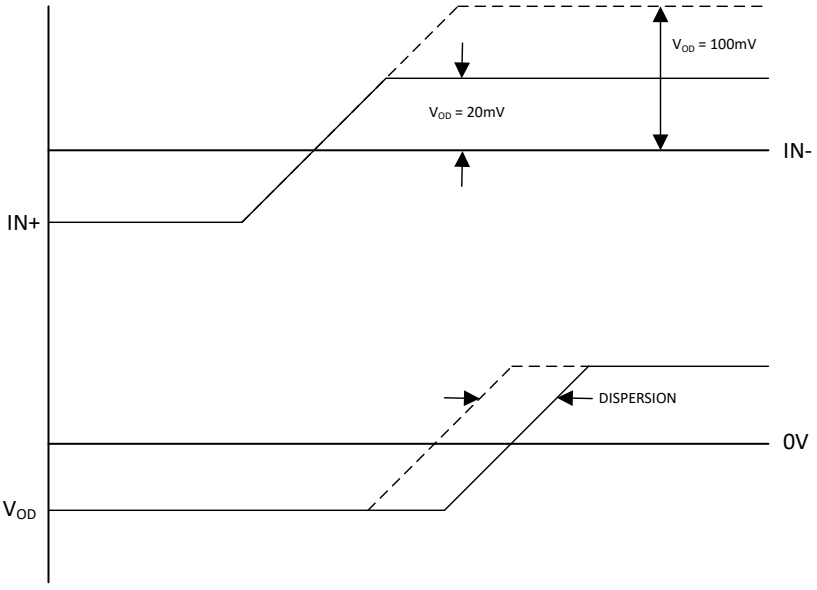

图 6-2. Overdrive Dispersion

6.7 Typical Characteristics

At T_A = 25°C, V_{CC} - V_{EE} = 3.3 V to 5 V while V_{EE} = GND = 0, V_{CM} = 2.5 V, and input overdrive/underdrive = 50 mV, unless otherwise noted.

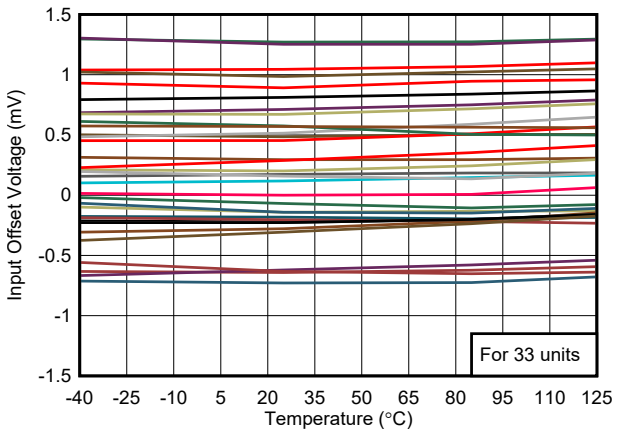

图 6-3. Offset vs. Temperature

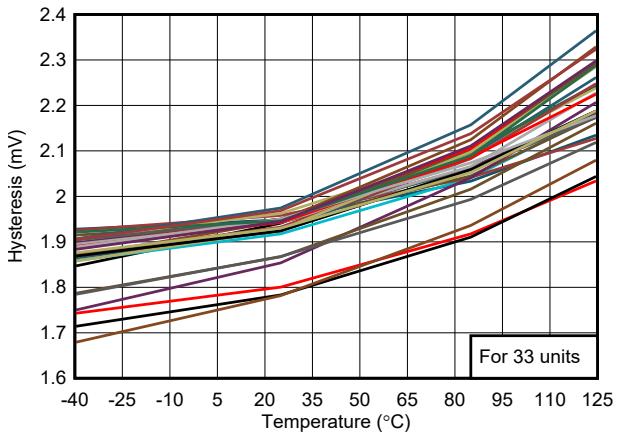

图 6-4. TLV3801 Hysteresis vs. Temperature

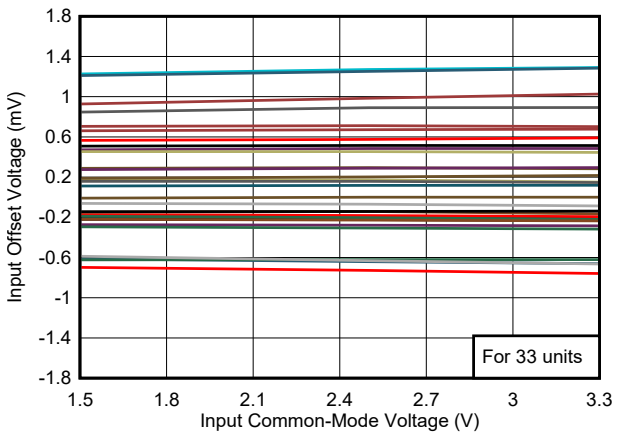

图 6-5. Offset vs. Common-Mode, 3.3 V

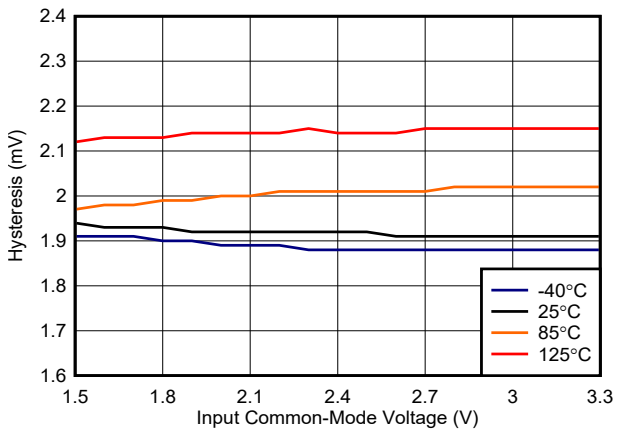

图 6-6. TLV3801 Hysteresis vs. Common-Mode, 3.3 V

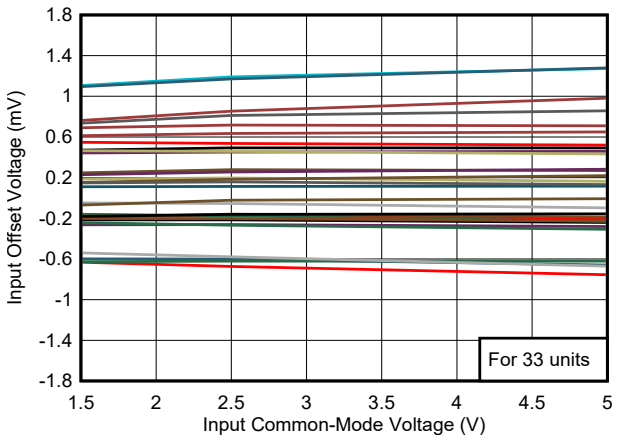

图 6-7. Offset vs. Common-Mode, 5 V

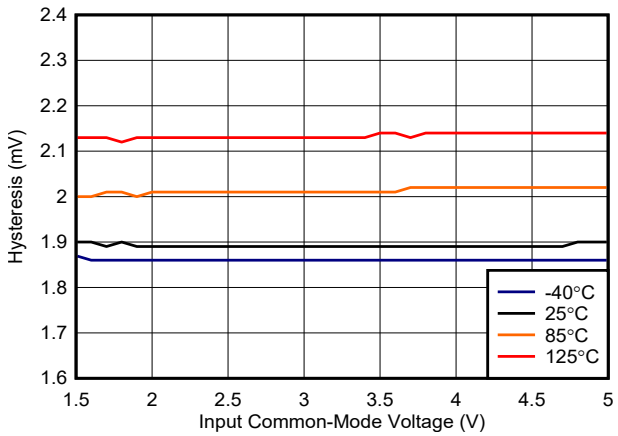

图 6-8. TLV3801 Hysteresis vs. Common-Mode, 5 V

Copyright © 2023 Texas Instruments Incorporated

6.7 Typical Characteristics (continued)

At T_A = 25°C, V_{CC} - V_{EE} = 3.3 V to 5 V while V_{EE} = GND = 0, V_{CM} = 2.5 V, and input overdrive/underdrive = 50 mV, unless otherwise noted.

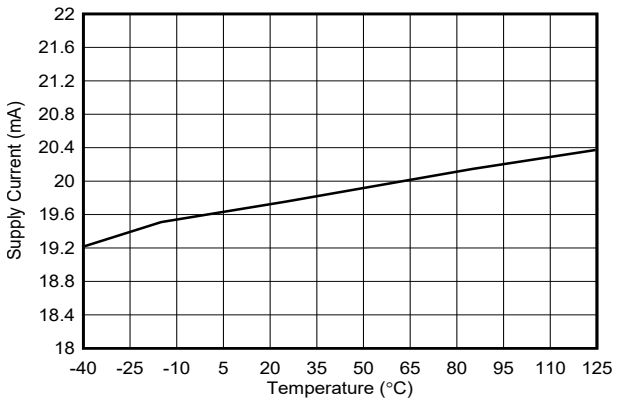

图 6-9. TLV3801 Supply Current vs. Temperature

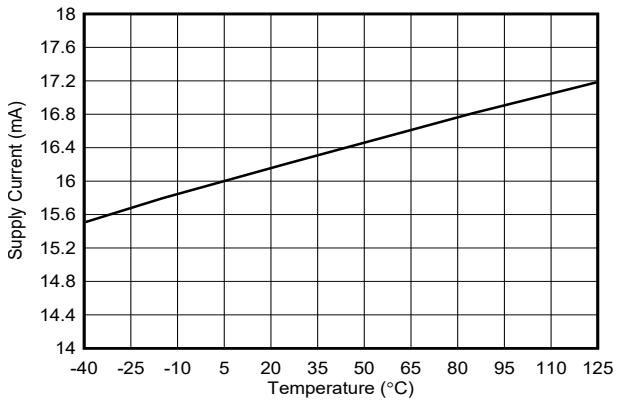

图 6-10. TLV3811(C) Supply Current vs. Temperature

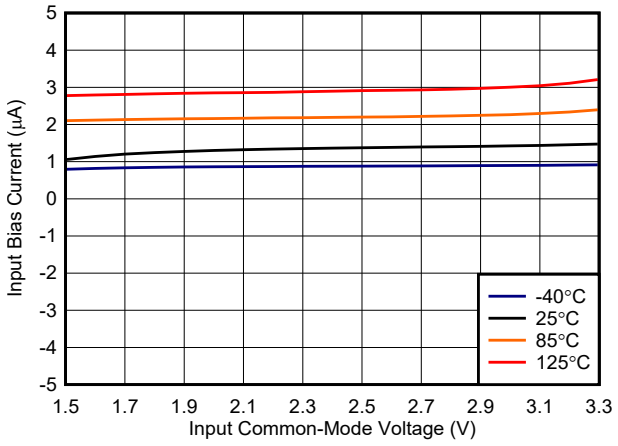

图 6-11. Bias Current vs. Common-Mode, 3.3 V

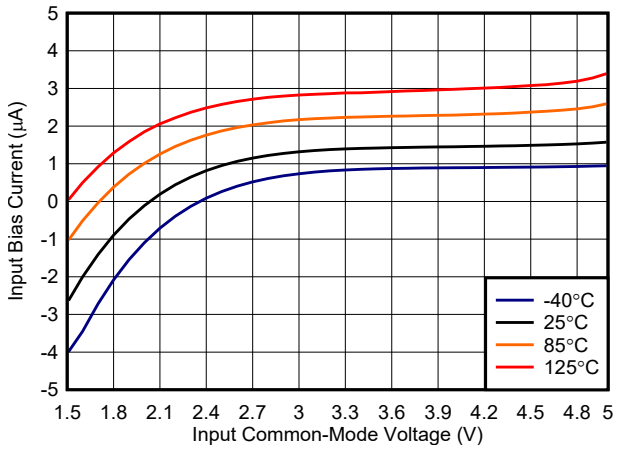

图 6-12. Bias Current vs. Common-Mode, 5 V

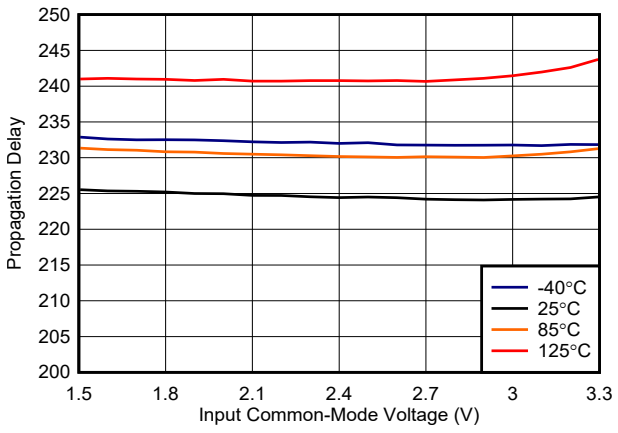

图 6-13. Propagation Delay vs. Common-Mode, 3.3 V

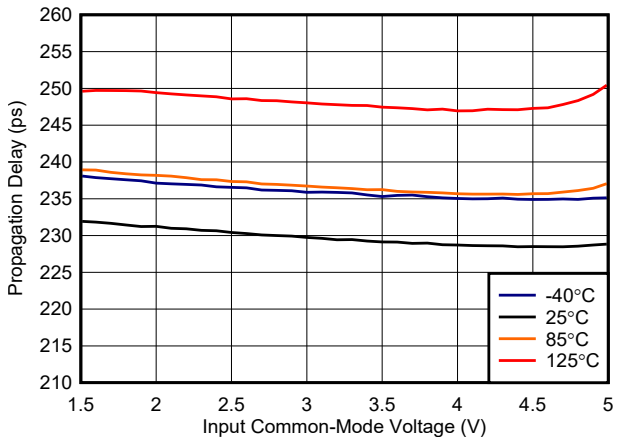

图 6-14. Propagation Delay vs. Common-Mode, 5 V

Copyright © 2023 Texas Instruments Incorporated

6.7 Typical Characteristics (continued)

At T_A = 25°C, V_{CC} - V_{EE} = 3.3 V to 5 V while V_{EE} = GND = 0, V_{CM} = 2.5 V, and input overdrive/underdrive = 50 mV, unless otherwise noted.

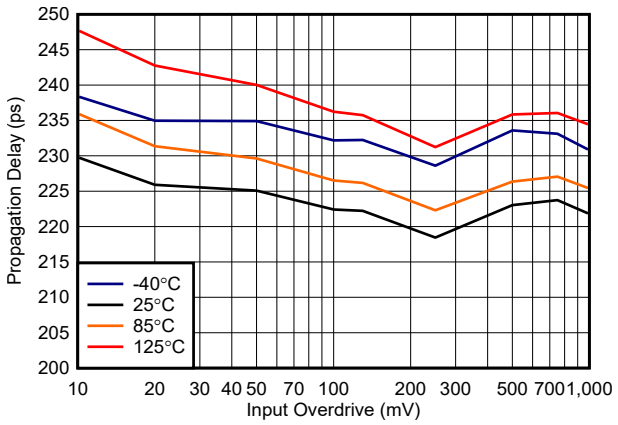

图 6-15. Propagation Delay vs. Overdrive, 3.3 V

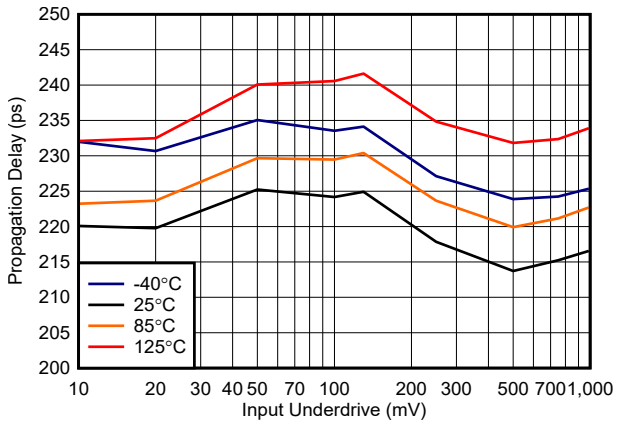

图 6-16. Propagation Delay vs. Underdrive, 3.3 V

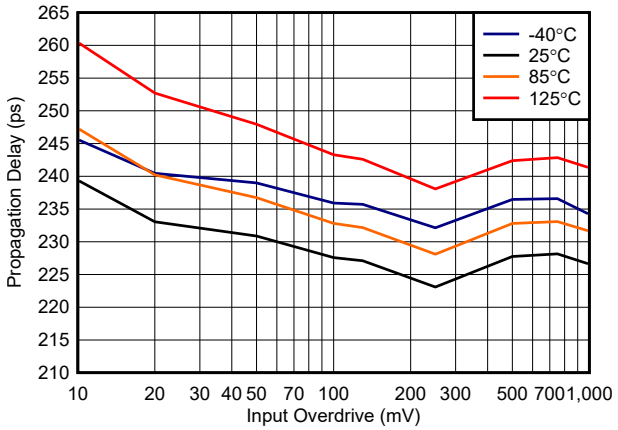

图 6-17. Propagation Delay vs. Overdrive, 5 V

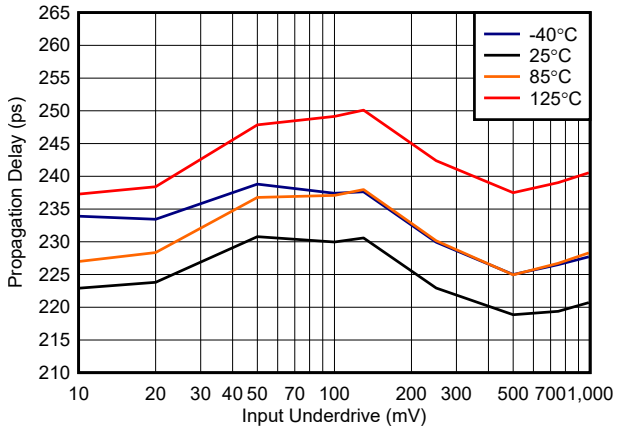

图 6-18. Propagation Delay vs. Underdrive, 5 V

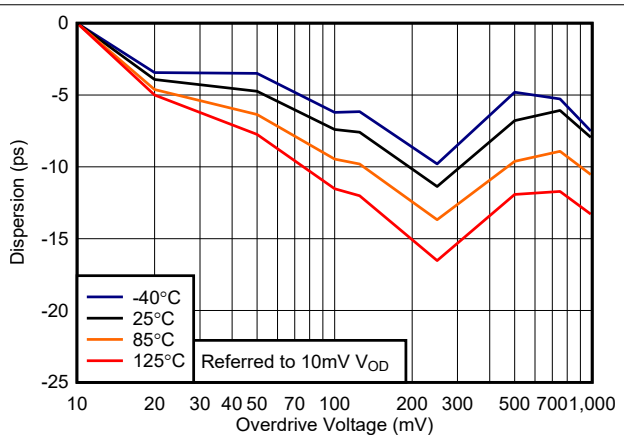

图 6-19. Dispersion vs. Overdrive, 3.3 V

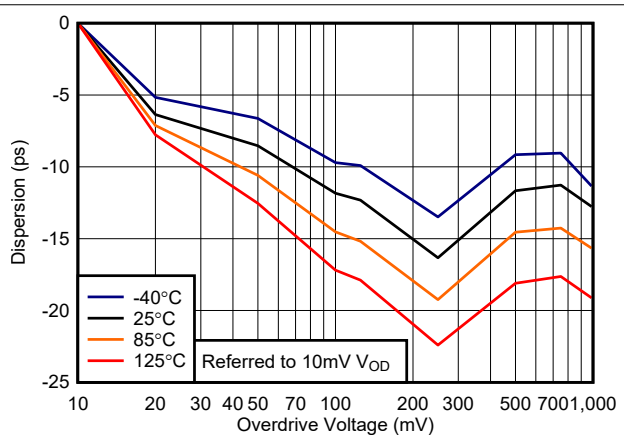

图 6-20. Dispersion vs. Overdrive, 5 V

Copyright © 2023 Texas Instruments Incorporated

6.7 Typical Characteristics (continued)

At T_A = 25°C, V_{CC} - V_{EE} = 3.3 V to 5 V while V_{EE} = GND = 0, V_{CM} = 2.5 V, and input overdrive/underdrive = 50 mV, unless otherwise noted.

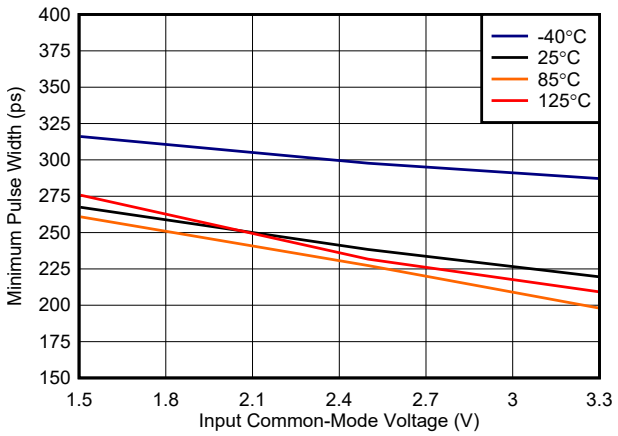

图 6-21. Minimum Pulse Width vs. Common-Mode, 3.3 V

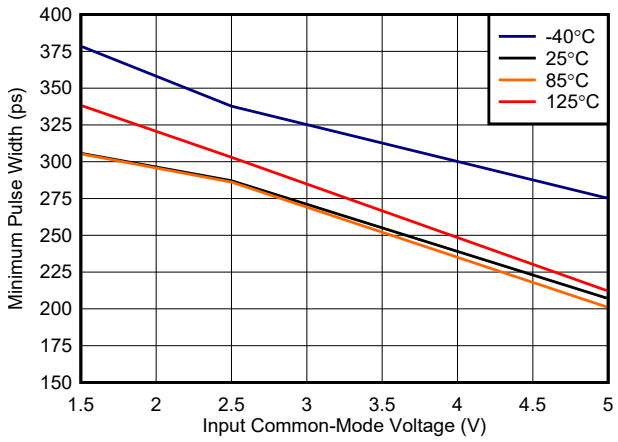

图 6-22. Minimum Pulse Width vs. Common-Mode, 5 V

7 Detailed Description

7.1 Overview

The TLV380x/TLV3811(C) are high-speed comparators with LVDS output. The fast response time of these comparators make them well suited for applications that require narrow pulse width detection or high toggle frequencies. The TLV3801 is available in the 8-pin WSON package and the TLV3802 is available in the 12-pin WSON package while the TLV3811(C) is available in the 6-pin DSBGA package.

7.2 Functional Block Diagram

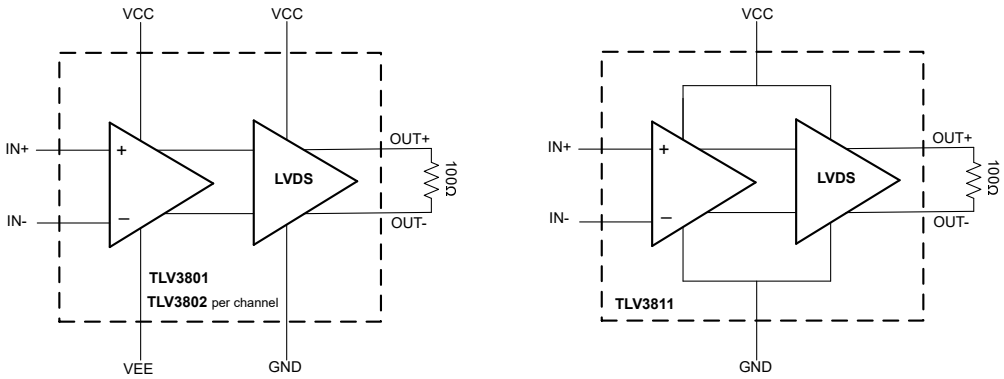

7.3 Feature Description

The TLV380x/TLV3811(C) are high-speed comparators with a typical propagation delay of 225 ps and LVDS output. The minimum pulse width detection capability is 240 ps and the typical toggle frequency is 3 GHz (6 Gbps). These comparators are well suited for distance sensing for LIDAR and time-of-flight applications as well as for high-speed test and measurement systems. The TLV380x has two separate power rails for the input and the output; this allows the input to be referenced from either single or split supply (VCC and VEE) while the output is referenced from ground (VCC and GND). On the other hand, the TLV3811(C) has one power rail for both inputs and outputs and can only be operated at a single supply.

7.4 Device Functional Modes

The TLV380x has a single functional mode and is operational on the condition that both the input supply voltage (VCC - VEE) is greater than or equal to 2.7 V and the output supply voltage (VCC - GND) is greater than or equal to 2.4 V.

The TLV3811(C) has a single functional mode and is operational when the power supply voltage (VCC - GND) is greater than or equal to 2.7 V.

7.4.1 Inputs

The TLV380x/TLV3811(C) feature an input stage, capable of operating between 1.5 V above VEE (GND for TLV3811(C)) and 0.1 V above VCC, with an internal ESD protection circuit that includes two pairs of front-to-back diodes between IN+ and IN- as well as two 50 Ω resistors, as shown in 图 7-1. This prevents damage to the input stage by limiting the differential input voltage to be no more than twice the diode's forward-voltage drop $2 \times V_F$ (2 × 0.7 V).

Copyright © 2023 Texas Instruments Incorporated

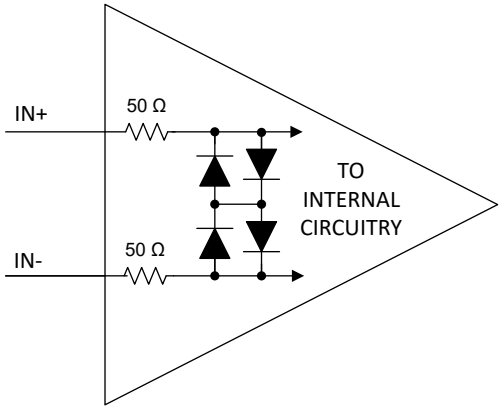

图 7-1. Input Stage Circuitry

When the differential input voltage exceeds 2 × V_F, the input bias current increases at the input pins IN+ and IN-, as shown in 方程式 1.

$$\text{Input Current} = [(V_{IN+} - V_{IN-}) - 2 \times V_F] / (2 \times 50) \quad (1)$$

To avoid damaging the inputs when exceeding the recommended input voltage range, an external resistor should be used to limit the current. The current should be limited to less than 10 mA.

7.4.2 LVDS Output

The TLV380x/TLV3811(C) outputs are LVDS compliant. When the input of the downstream device is terminated with a 100 Ω resistor, the comparators provide a ±350 mV differential swing at an output common-mode voltage of 1.25 V above GND. Fully differential outputs enable fast digital toggling and reduce EMI compared to single-ended output standards.

Copyright © 2023 Texas Instruments Incorporated

8 Application and Implementation

备注

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI’s customers are responsible for determining suitability of components for their purposes, as well as validating and testing their design implementation to confirm system functionality.

8.1 Application Information

8.1.1 Capacitive Loads

Under reasonable capacitive loads, the device maintains specified propagation delay. However, excessive capacitive loading under high switching frequencies may increase supply current, propagation delay, or induce decreased slew rate.

8.1.2 Hysteresis

A comparator's high, open-loop gain creates a small band of input differential voltage where the comparator may produce "chatter" which causes the output to toggle back and forth between a “logic high” and a “logic low”. This can cause design challenges for inputs with slow rise and fall times or systems with excessive noise. These challenges can be prevented by adding hysteresis to the comparator. However, hysteresis must be added strategically when input signals are small since it can cuase signals to go undetected. As a result, TLV3811C is optimized for detecting small, fast-switching inputs and has 0 mV of internal hysteresis. On the other hand, for detecting larger input signals in the presense of noise, the TLV3811 has 1.1 mV of internal hysteresis and TLV3801 and TLV3802 have 2 mV.

Since the TLV380x/TLV3811(C) only have a minimal amount of internal hysteresis, external hysteresis can be applied in the form of a positive feedback loop that adjusts the trip point of the comparator depending on its current output state. See the Non-Inverting Comparator With Hysteresis section for more details.

8.2 Typical Application

8.2.1 Optical Receiver

The TLV380x/TLV3811(C) can be used in conjunction with a high performance amplifier such as the OPA858 to create an optical receiver as shown in the 图 8-1. The photodiode operates in photoconductive mode: exposure to light will cause a reverse current through the photodiode. A bias voltage is applied to the op amp's non-inverting input to prevent saturation at the negative power supply. The OPA858 takes the current conducting through the diode and translates it into a voltage for a high speed comparator to detect. The TLV380x/TLV3811(C) will then output the proper LVDS signal according to the threshold set (V_{REF}).

Copyright © 2023 Texas Instruments Incorporated

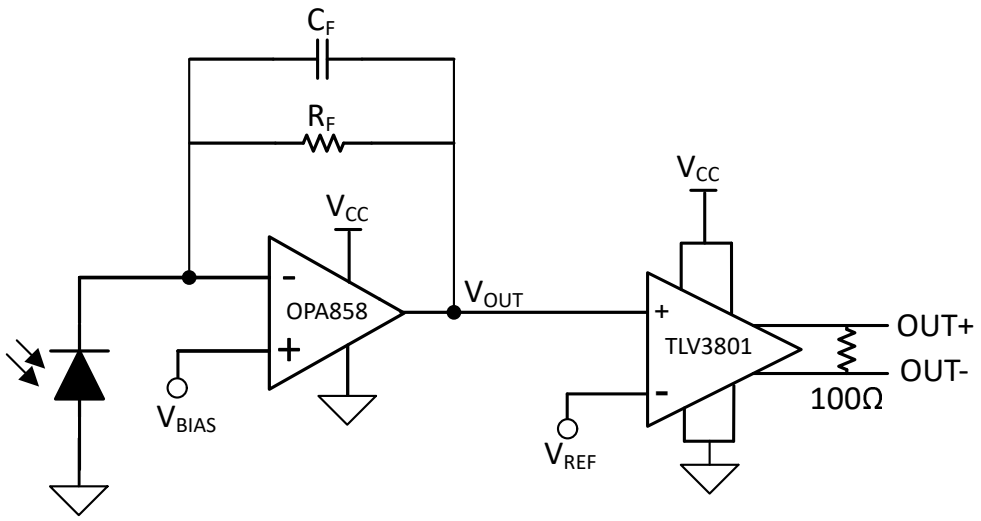

图 8-1. Optical Receiver

8.2.1.1 Design Requirements

表 8-1. Design Parameters

PARAMETER	VALUE
V_{CC}	+5 V
V_{EE}	0 V
$V_{OUT, SWING}$	100 mV
I_{DIODE}	100 µA
f_p	159 MHz

8.2.1.2 Detailed Design Procedure

Set V_{BIAS} to be in the recommended common-mode voltage range of the OPA858. This is also the minimum output voltage of the op amp $V_{OUT, MIN}$ as the op amp will attempt to settle at the voltage applied to the non-inverting input.

The maximum output voltage of the op amp $V_{OUT, MAX}$ can be calculated from the desired output voltage swing $V_{OUT, SWING}$ and $V_{OUT, MIN}$, as shown in 方程式 2.

$$V_{OUT, MAX} = V_{OUT, SWING} + V_{OUT, MIN} \quad (2)$$

The gain resistor R_F is determined by the desired $V_{OUT, MAX}$ and $V_{OUT, MIN}$ and the maximum current I_{DIODE} through the diode, as shown in 方程式 2.

$$R_F = (V_{OUT, MAX} - V_{OUT, MIN}) / I_{DIODE} \quad (3)$$

The feedback capacitor, in combinaton with the gain resistor, forms a pole in the frequency response of the amplifier. The feedback capacitor can be determined by the gain resistor and the desired pole frequency f_p, as shown in 方程式 2.

$$C_F = 1 / (2 \times \pi \times R_F \times f_p) \quad (4)$$

Set V_{REF} to be the switching threshold voltage between $V_{OUT, MAX}$ and $V_{OUT, MIN}$.

Copyright © 2023 Texas Instruments Incorporated

Select values for V_{BIAS} and V_{REF}. Plug in given values for $V_{OUT, MAX,}$ I_{DIODE}, and f_p. For the given example, V_{BIAS} = 1.5 V, V_{REF} = 1.55 V, and R_F, C_F is solved as 1 kΩ and 1 pF, respectively.

For more information, please refer to the op amp tutorials for stability analysis on the transimpedance amplifier Spice Stability Analysis and Op Amp Stability. See application note SBOA268A Transimpedance Amplifier Circuit for more detailed procedures.

8.2.1.3 Application Performance Plots

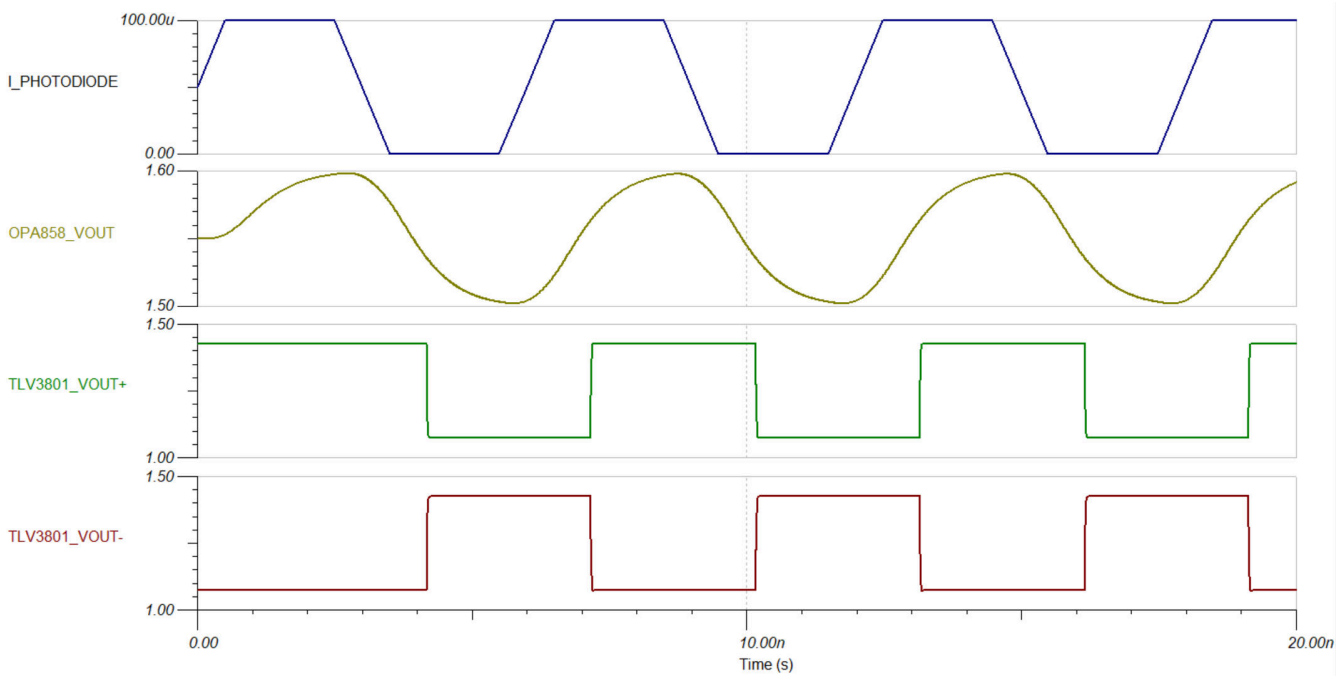

图 8-2. Optical Receiver Output Waveforms

8.2.2 Non-Inverting Comparator With Hysteresis

A way to implement external hysteresis is to add two resistors to the circuit: one in series between the reference voltage and the inverting pin, and another from the inverting pin to one of the differential output pins.

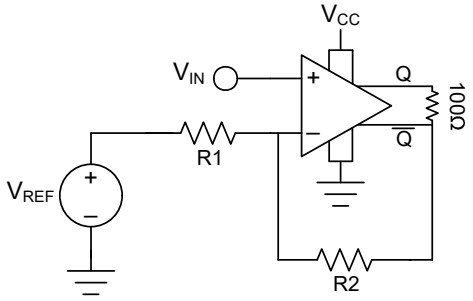

图 8-3. Non-Inverting Comparator with Hysteresis Circuit

8.2.2.1 Design Requirements

表 8-2. Design Parameters

PARAMETER	VALUE
V_{HYS}	50 mV
V_{REF}	2.5 V

Copyright © 2023 Texas Instruments Incorporated

表 8-2. Design Parameters（续）

PARAMETER	VALUE
V_{T1}	2.34 V
V_{T2}	2.29 V
Q	1.375 V
$\overline{Q}$	1.025 V

8.2.2.2 Detailed Design Procedure

First, create an equation for V_T that covers both output voltages when the output is high or low.

$$V_{T1} = \frac{V_{REF}R_2}{R_1+R_2} + \frac{QR_1}{R_1+R_2} \quad (5)$$

$$V_{T2} = \frac{V_{REF}R_2}{R_1+R_2} + \frac{\overline{Q}R_1}{R_1+R_2} \quad (6)$$

The hysteresis voltage in this network is equal to the difference in the two threshold voltage equations.

$$V_{HYS} = V_{T1}-V_{T2} \quad (7)$$

$$V_{HYS} = \frac{V_{REF}R_2}{R_1+R_2} + \frac{QR_1}{R_1+R_2} - \frac{V_{REF}R_2}{R_1+R_2} - \frac{\overline{Q}R_1}{R_1+R_2} \quad (8)$$

$$V_{HYS} = \frac{(Q-\overline{Q})R_1}{R_1+R_2} \quad (9)$$

$$V_{HYS} = \frac{V_{OD}R_1}{R_1+R_2} \quad (10)$$

Note that these equations do not take into account the effects of the internal hysteresis and offset voltage of the comparator. Design parameters will need to be adjusted accordingly.

Select a value for R2. Plug in given values for V_{REF}, V_{T1}, V_{T2}, Q, and $\overline{Q}$, and solve for R1. For the given example, R2 = 50 kΩ, and R1 is solved as = 8.3 kΩ.

Copyright © 2023 Texas Instruments Incorporated

8.2.2.3 Application Performance Plots

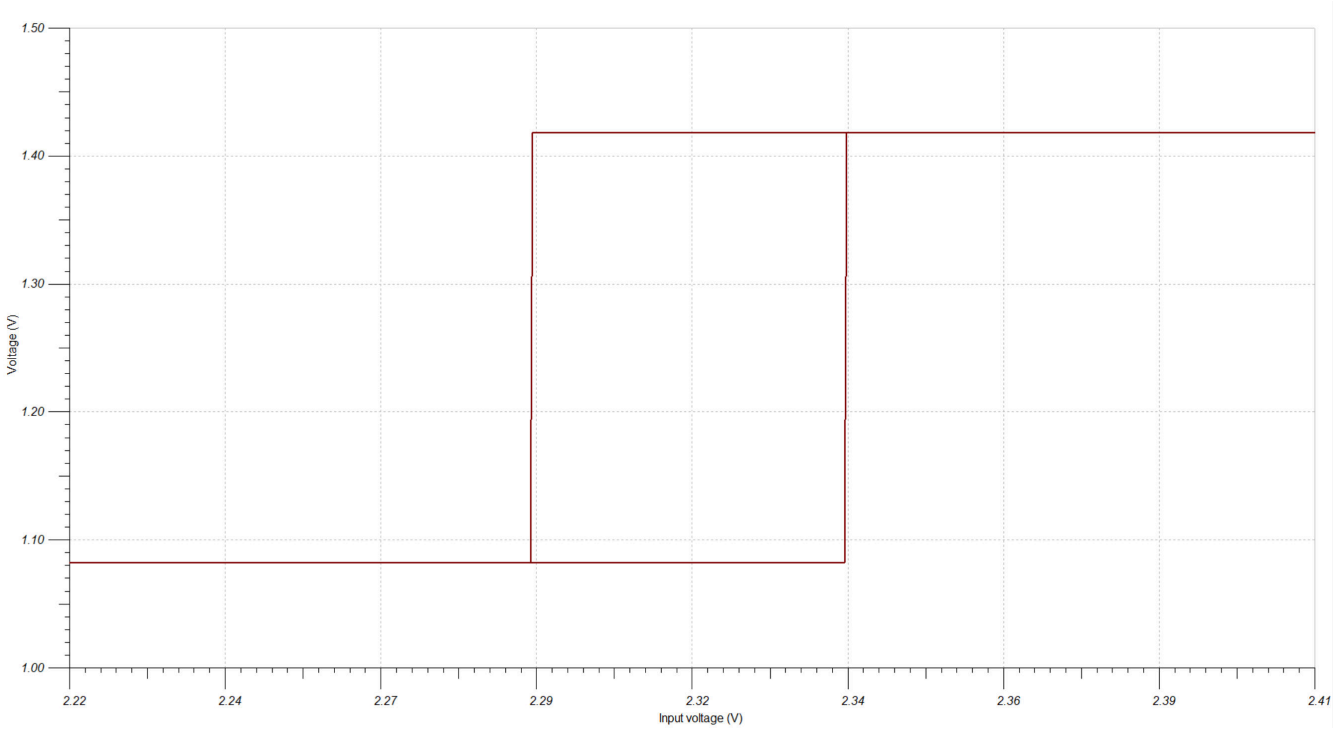

图 8-4. Hysteresis Curve for LVDS Comparator

8.2.3 Logic Clock Source to LVDS Transceiver

The 图 8-5 shows a logic clock source being terminated and driven with the TLV3802/TLV3811(C) across a CAT6 Cable to receive an equivalent LVDS clock signal at the receiver end.

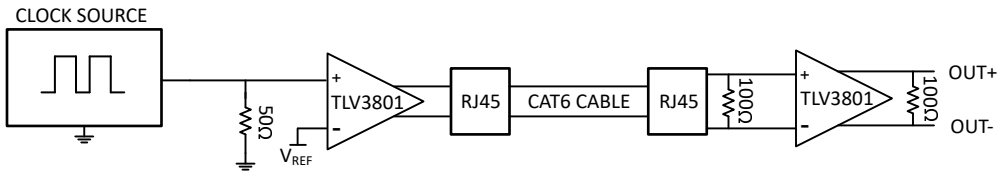

图 8-5. LVDS Clock Transceiver

8.2.4 External Trigger Function for Oscilloscopes

图 8-6 is a typical configuration for creating an external trigger on oscilliscopes. The user adjusts the trigger level, and a DAC converts this trigger level to a voltage the TLV380x/TLV3811(C) can use as a reference. The input voltage from an oscilloscope channel is then compared to the trigger reference voltage, and the TLV380x/TLV3811(C) sends an LVDS signal to a downstream FPGA to begin a capture. It is common to see bipolar inputs in test and measurement systems such as oscilloscopes; therefore, the TLV380x can be configured in split supply so that the inputs are in the allowable input voltage range.

Copyright © 2023 Texas Instruments Incorporated

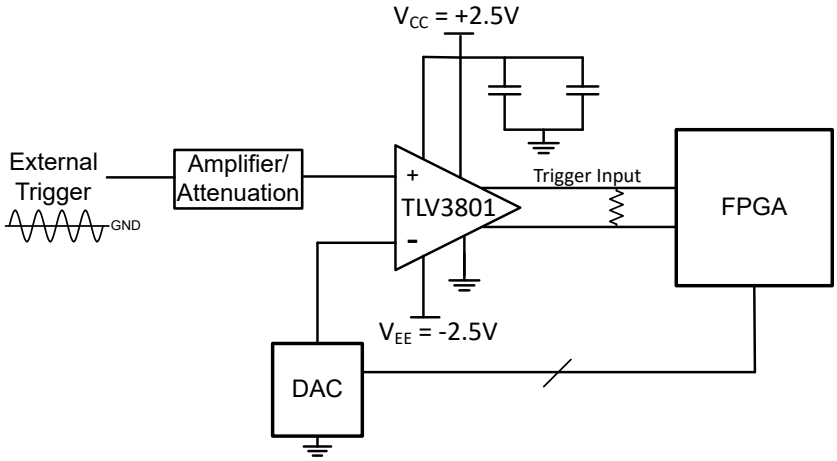

图 8-6. External Trigger Function

8.3 Power Supply Recommendations

The TLV380x has two seperate power rails: VCC - VEE for the input stage and VCC - GND for the output stage. This allows for both single and split supply capabilities for the input stage with a seperate ground reference for the LVDS output stage. Split supply operation allows users to apply both positive and negative (bipolar) voltages to the input pins.

When operating from a single supply, the supply voltage range for both the input and output stage is 2.7 V to 5.25 V. When operating from split supply rails, the supply voltage range for the input stage (VCC - VEE) is 2.7 V to 5.25 V, and the supply voltage range for the output stage (VCC - GND) is 2.4 V to 5.25 V. The output logic level is independent of the VCC and VEE levels. The TLV3811(C) is specified for operation from 2.4 V to 5.25 V and can only be operated from a single supply with both inputs and outputs referenced to GND.

Regardless of single supply or split supply operation, proper decoupling capacitors are required. It is recommended to use a scheme of multiple, low-ESR ceramic capacitors from the supply pins to the ground plane for optimum performance. A good combination would be 100 pF, 10 nF, and 1 uF with the lowest value capacitor closest to the comparator.

Copyright © 2023 Texas Instruments Incorporated

8.4 Layout

8.4.1 Layout Guidelines

Comparators are very sensitive to input noise. For best results, adhere to the following layout guidelines.

1. Use a printed-circuit-board (PCB) with a good, unbroken, low-inductance ground plane. Proper grounding (use of a ground plane) helps maintain specified device performance.
2. To minimize supply noise for single and split supply, place decoupling capacitor arrays as close as possible to V_{CC}.
3. On the inputs and the output, keep lead lengths as short as possible to avoid unwanted parasitic feedback around the comparator. Keep inputs away from the output.
4. Solder the device directly to the PCB rather than using a socket.
5. For slow-moving input signals, take care to prevent parasitic feedback. A small capacitor (1000 pF or less) placed between the inputs can help eliminate oscillations in the transition region. This capacitor causes some degradation to propagation delay when impedance is low. The topside ground plane runs between the output and inputs.
6. Use a 100 Ω termination resistor across the device's LVDS output.
7. Use higher performance substrate materials such as Rogers.

8.4.2 Layout Example

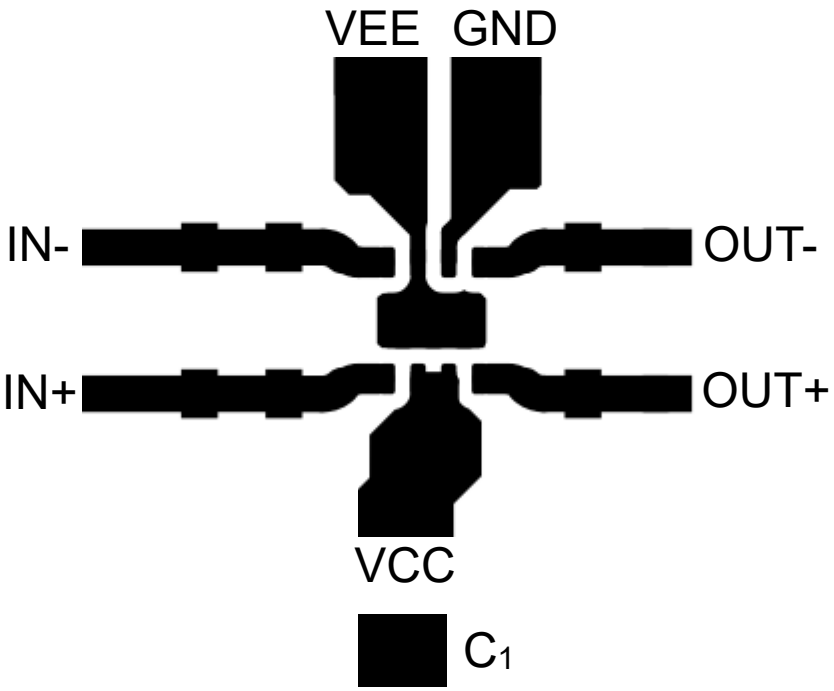

图 8-7. TLV3801EVM Layout Example

Copyright © 2023 Texas Instruments Incorporated

9 Device and Documentation Support

9.1 Device Support

9.1.1 Development Support

LIDAR Pulsed Time of Flight Reference Design

9.2 接收文档更新通知

要接收文档更新通知，请导航至 ti.com 上的器件产品文件夹。点击*通知* 进行注册，即可每周接收产品信息更改摘要。有关更改的详细信息，请查看任何已修订文档中包含的修订历史记录。

9.3 支持资源

TI E2E™ 中文支持论坛是工程师的重要参考资料，可直接从专家处获得快速、经过验证的解答和设计帮助。搜索现有解答或提出自己的问题，获得所需的快速设计帮助。

链接的内容由各个贡献者“按原样”提供。这些内容并不构成 TI 技术规范，并且不一定反映 TI 的观点；请参阅 TI 的使用条款。

9.4 Trademarks

TI E2E™ is a trademark of Texas Instruments.
所有商标均为其各自所有者的财产。

9.5 静电放电警告

静电放电 (ESD) 会损坏这个集成电路。德州仪器 (TI) 建议通过适当的预防措施处理所有集成电路。如果不遵守正确的处理和安装程序，可能会损坏集成电路。

ESD 的损坏小至导致微小的性能降级，大至整个器件故障。精密的集成电路可能更容易受到损坏，这是因为非常细微的参数更改都可能会导致器件与其发布的规格不相符。

9.6 术语表

TI 术语表　　本术语表列出并解释了术语、首字母缩略词和定义。

10 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

Copyright © 2023 Texas Instruments Incorporated

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package | Pins	Package qty | Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
TLV3801DSGR	Active	Production	WSON (DSG) | 8	3000 | LARGE T&R	Yes	SN	Level-2-260C-1 YEAR	-40 to 125	3801
TLV3801DSGR.B	Active	Production	WSON (DSG) | 8	3000 | LARGE T&R	Yes	SN	Level-2-260C-1 YEAR	-40 to 125	3801
TLV3801DSGT	Active	Production	WSON (DSG) | 8	250 | SMALL T&R	Yes	SN	Level-2-260C-1 YEAR	-40 to 125	3801
TLV3801DSGT.B	Active	Production	WSON (DSG) | 8	250 | SMALL T&R	Yes	SN	Level-2-260C-1 YEAR	-40 to 125	3801
TLV3802DSSR	Active	Production	WSON (DSS) | 12	3000 | LARGE T&R	Yes	SN	Level-2-260C-1 YEAR	-40 to 125	3802
TLV3802DSSR.B	Active	Production	WSON (DSS) | 12	3000 | LARGE T&R	Yes	SN	Level-2-260C-1 YEAR	-40 to 125	3802
TLV3811CYBGR	Active	Production	DSBGA (YBG) | 6	3000 | LARGE T&R	Yes	SNAGCU	Level-1-260C-UNLIM	-40 to 125	02
TLV3811CYBGR.A	Active	Production	DSBGA (YBG) | 6	3000 | LARGE T&R	Yes	SNAGCU	Level-1-260C-UNLIM	-40 to 125	02
TLV3811CYBGT	Active	Production	DSBGA (YBG) | 6	250 | LARGE T&R	Yes	SNAGCU	Level-1-260C-UNLIM	-40 to 125	O2
TLV3811CYBGT.A	Active	Production	DSBGA (YBG) | 6	250 | LARGE T&R	Yes	SNAGCU	Level-1-260C-UNLIM	-40 to 125	O2
TLV3811YBGR	Active	Production	DSBGA (YBG) | 6	3000 | LARGE T&R	Yes	SNAGCU	Level-1-260C-UNLIM	-40 to 125	LQ
TLV3811YBGR.A	Active	Production	DSBGA (YBG) | 6	3000 | LARGE T&R	Yes	SNAGCU	Level-1-260C-UNLIM	-40 to 125	LQ
TLV3811YBGT	Active	Production	DSBGA (YBG) | 6	250 | SMALL T&R	Yes	SNAGCU	Level-1-260C-UNLIM	-40 to 125	LQ
TLV3811YBGT.A	Active	Production	DSBGA (YBG) | 6	250 | SMALL T&R	Yes	SNAGCU	Level-1-260C-UNLIM	-40 to 125	LQ

(1) **Status:** For more details on status, see our product life cycle.

(2) **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

(3) **RoHS values:** Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

(4) **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

(5) **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

(6) **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

OTHER QUALIFIED VERSIONS OF TLV3801, TLV3802 :

- Automotive : TLV3801-Q1, TLV3802-Q1

NOTE: Qualified Version Definitions:

- Automotive - Q100 devices qualified for high-reliability automotive applications targeting zero defects

TAPE AND REEL INFORMATION

REEL DIMENSIONS

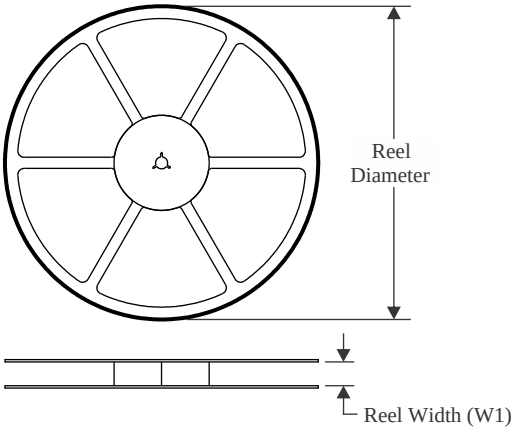

TAPE DIMENSIONS

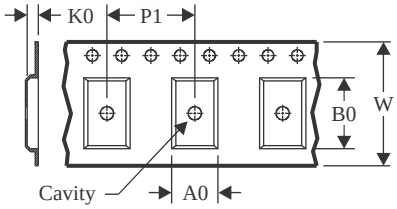

A0	Dimension designed to accommodate the component width
B0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE

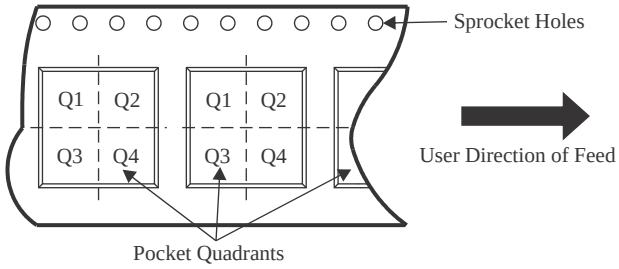

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
TLV3801DSGR	WSON	DSG	8	3000	180.0	8.4	2.2	2.2	1.2	4.0	8.0	Q2
TLV3801DSGT	WSON	DSG	8	250	179.0	8.4	2.2	2.2	1.2	4.0	8.0	Q2
TLV3802DSSR	WSON	DSS	12	3000	180.0	8.4	2.3	3.2	1.0	4.0	8.0	Q1
TLV3811CYBGR	DSBGA	YBG	6	3000	180.0	8.4	0.87	1.27	0.6	2.0	8.0	Q2
TLV3811CYBGT	DSBGA	YBG	6	250	180.0	8.4	0.87	1.27	0.6	2.0	8.0	Q2
TLV3811YBGT	DSBGA	YBG	6	250	180.0	8.4	0.87	1.27	0.6	2.0	8.0	Q2

TAPE AND REEL BOX DIMENSIONS

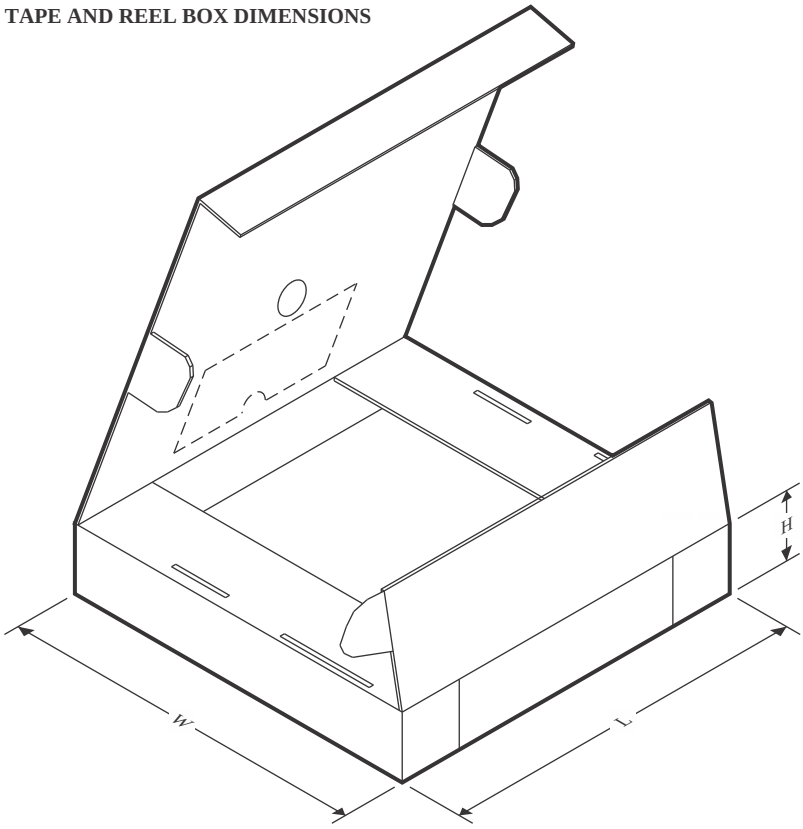

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
TLV3801DSGR	WSON	DSG	8	3000	213.0	191.0	35.0
TLV3801DSGT	WSON	DSG	8	250	213.0	191.0	35.0
TLV3802DSSR	WSON	DSS	12	3000	213.0	191.0	35.0
TLV3811CYBGR	DSBGA	YBG	6	3000	182.0	182.0	20.0
TLV3811CYBGT	DSBGA	YBG	6	250	182.0	182.0	20.0
TLV3811YBGT	DSBGA	YBG	6	250	182.0	182.0	20.0

GENERIC PACKAGE VIEW

DSG 8

WSON - 0.8 mm max height

2 x 2, 0.5 mm pitch

PLASTIC SMALL OUTLINE - NO LEAD

This image is a representation of the package family, actual package may vary.
Refer to the product data sheet for package details.

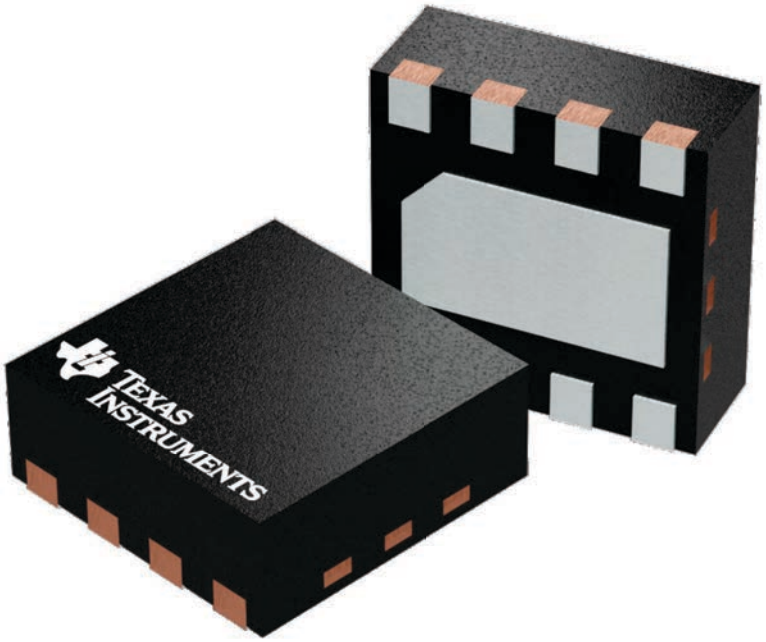

4224783/A

PACKAGE OUTLINE

DSG0008B

WSON - 0.8 mm max height

PLASTIC SMALL OUTLINE - NO LEAD

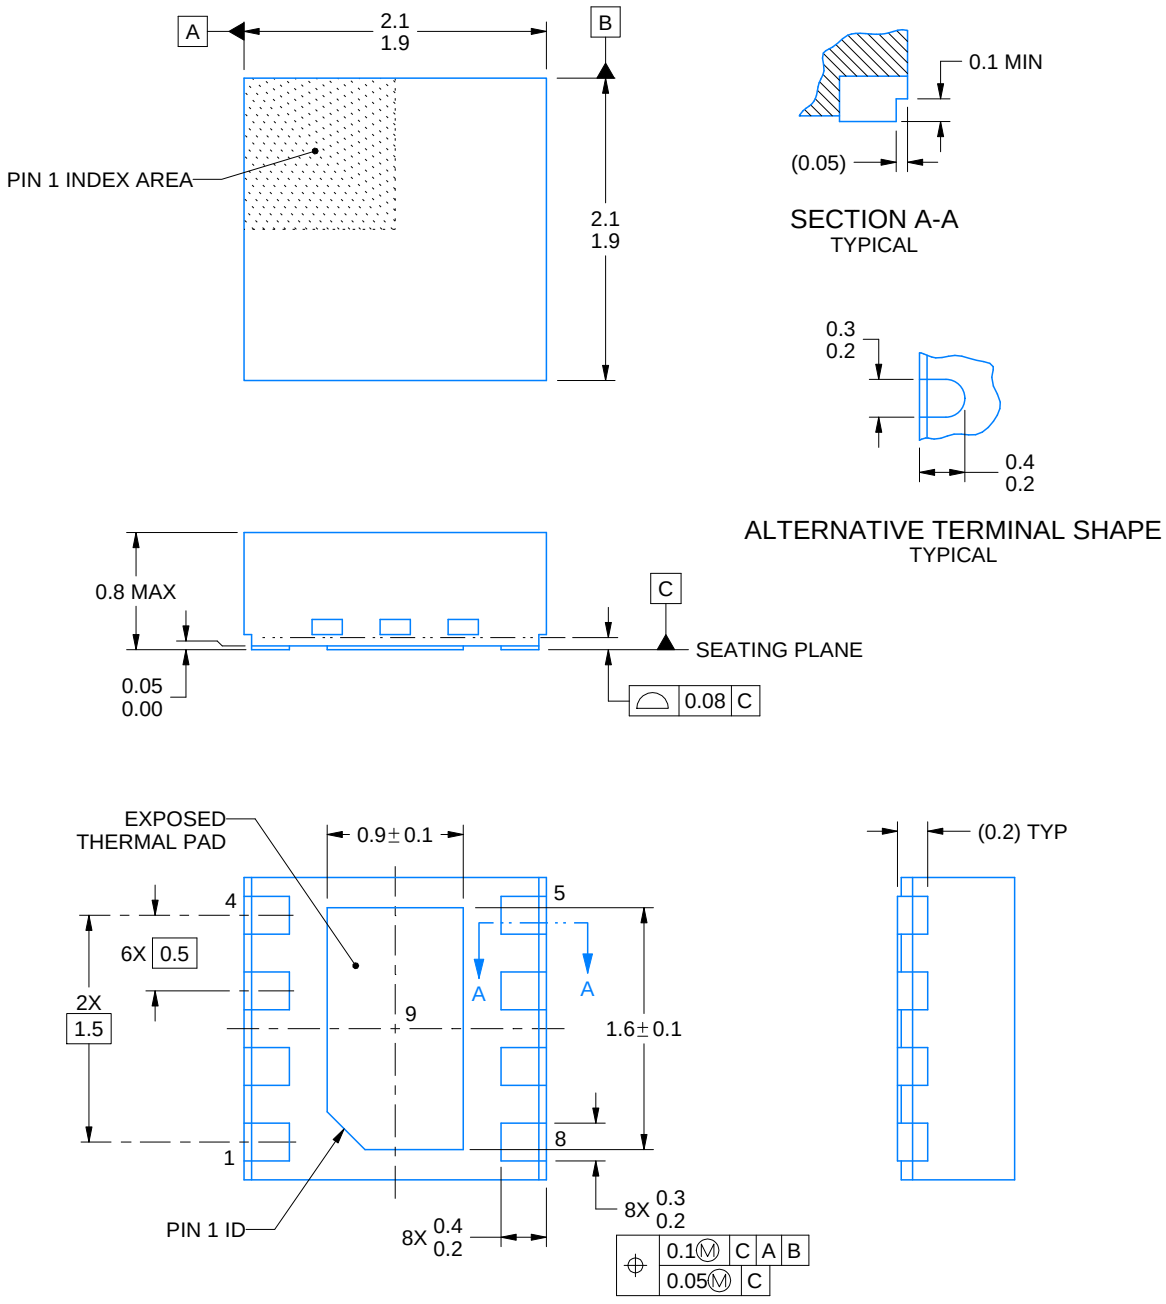

4222124/E 05/2020

NOTES:

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. The package thermal pad must be soldered to the printed circuit board for thermal and mechanical performance.

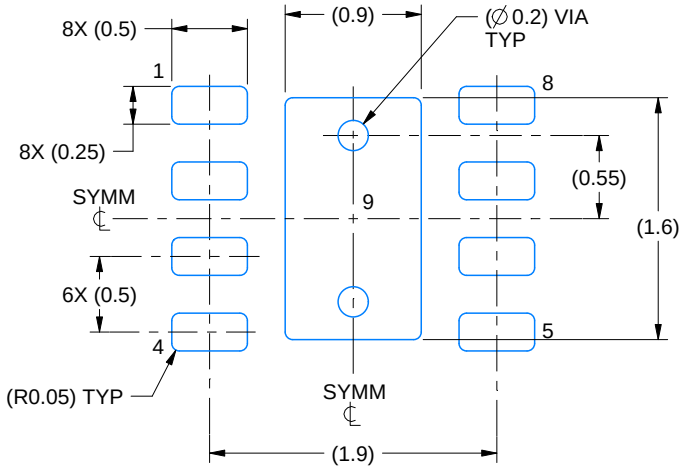

LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE:20X

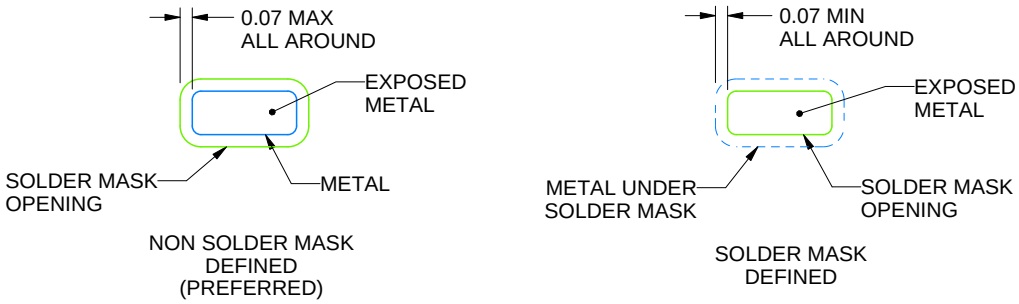

SOLDER MASK DETAILS

4222124/E 05/2020

NOTES: (continued)

4. This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature number SLUA271 (www.ti.com/lit/slua271).
5. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.

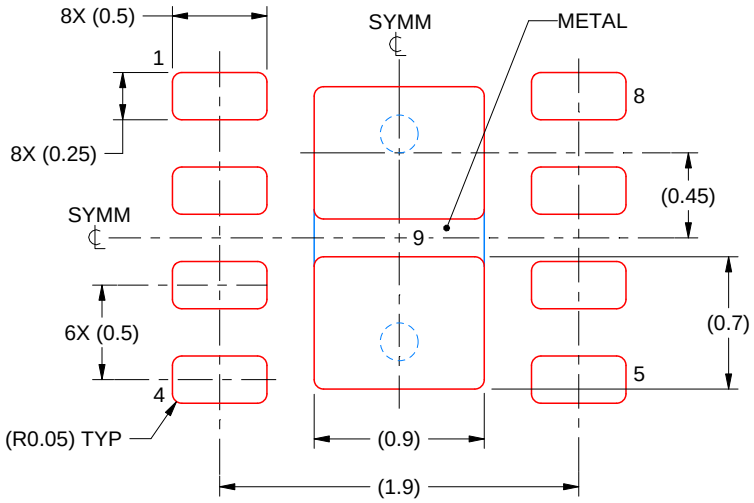

SOLDER PASTE EXAMPLE
BASED ON 0.125 mm THICK STENCIL

EXPOSED PAD 9:
87% PRINTED SOLDER COVERAGE BY AREA UNDER PACKAGE
SCALE:25X

4222124/E 05/2020

NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.

GENERIC PACKAGE VIEW

DSS 12 WSON - 0.8 mm max height

PLASTIC SMALL OUTLINE - NO LEAD

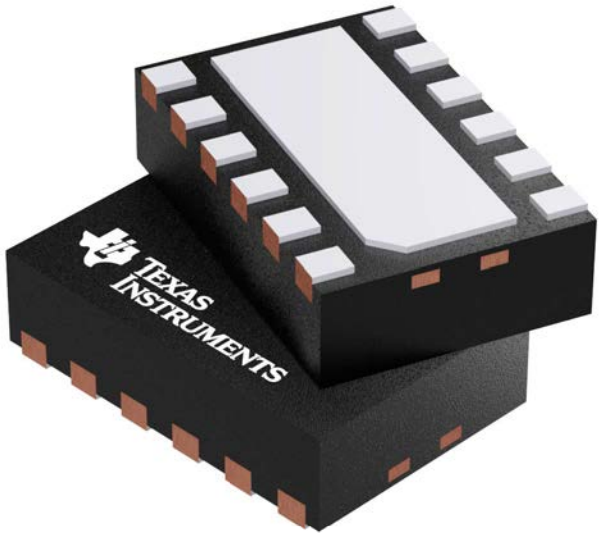

Images above are just a representation of the package family, actual package may vary.
Refer to the product data sheet for package details.

DSS0012C

PACKAGE OUTLINE

WSON - 0.8 mm max height

PLASTIC SMALL OUTLINE - NO LEAD

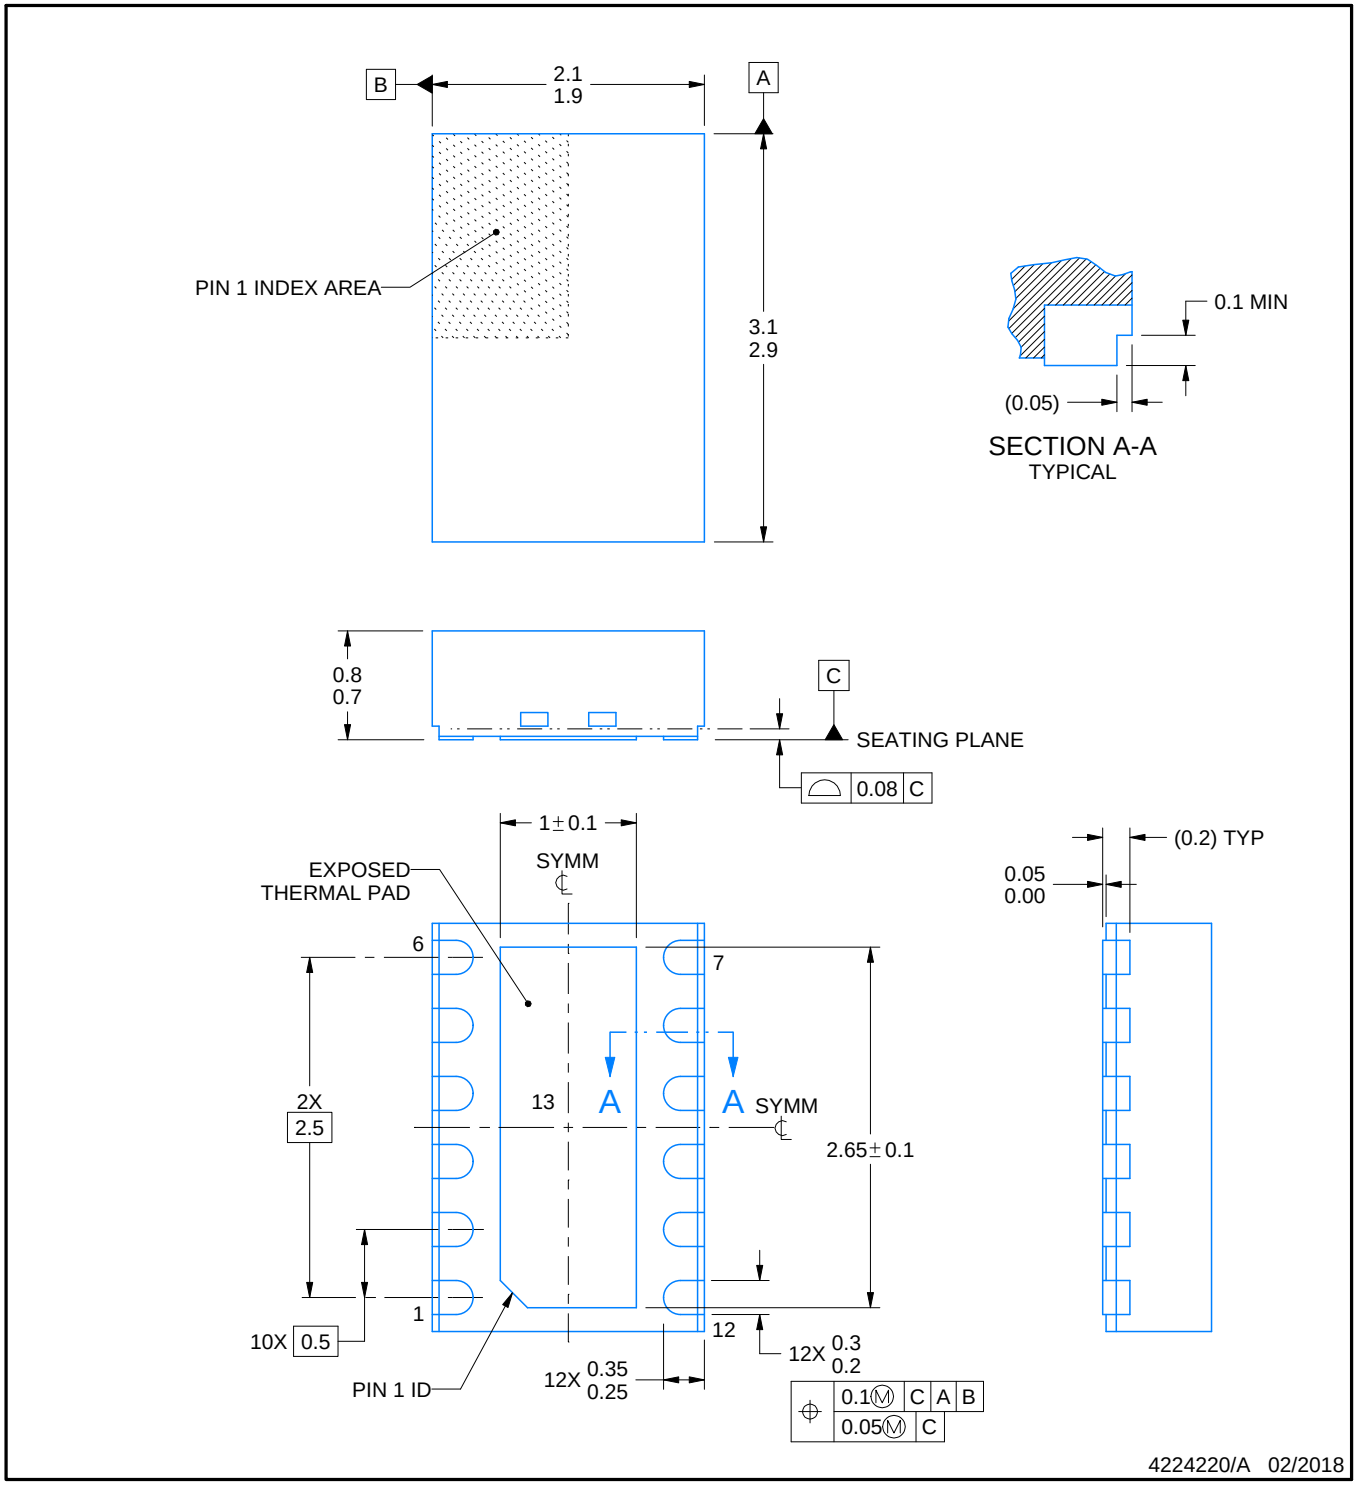

NOTES:

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. The package thermal pad must be soldered to the printed circuit board for optimal thermal and mechanical performance.

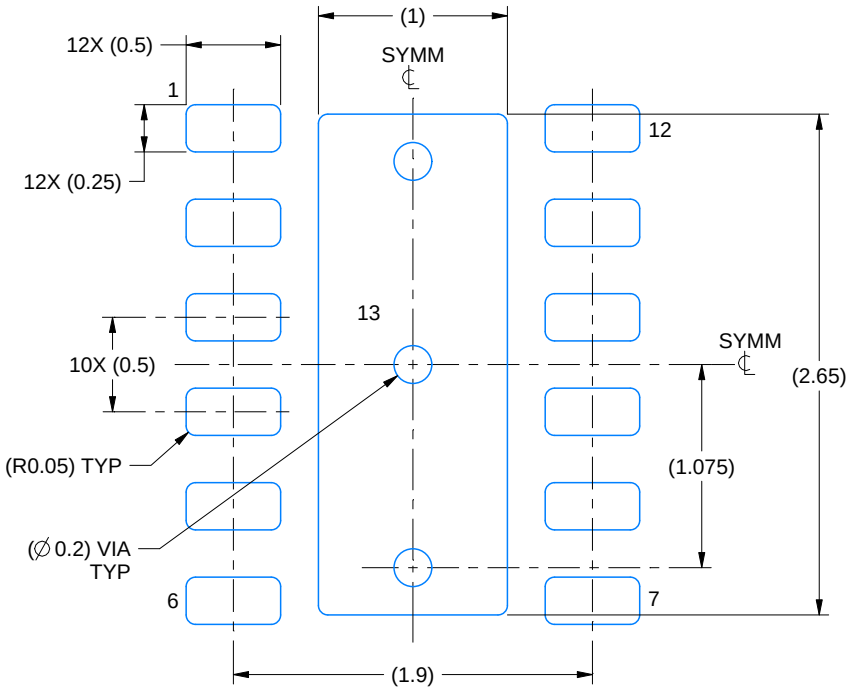

LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE:25X

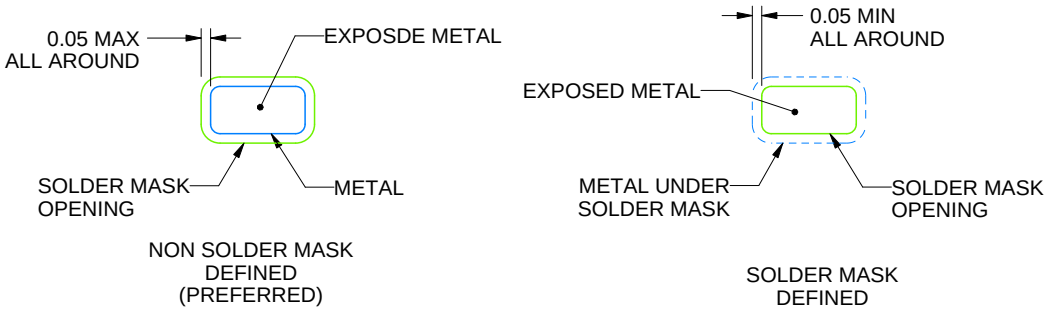

SOLDER MASK DETAILS

4224220/A 02/2018

NOTES: (continued)

4. This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature number SLUA271 (www.ti.com/lit/slua271).
5. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.

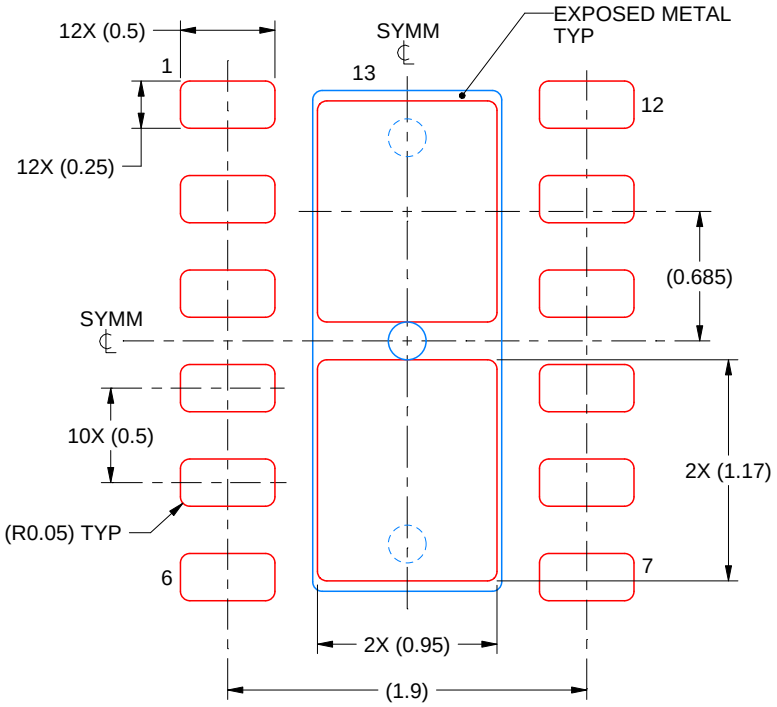

SOLDER PASTE EXAMPLE
BASED ON 0.125 mm THICK STENCIL

EXPOSED PAD 13:
83% PRINTED SOLDER COVERAGE BY AREA UNDER PACKAGE
SCALE:25X

4224220/A 02/2018

NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.

YBG0006

PACKAGE OUTLINE

DSBGA - 0.5 mm max height

DIE SIZE BALL GRID ARRAY

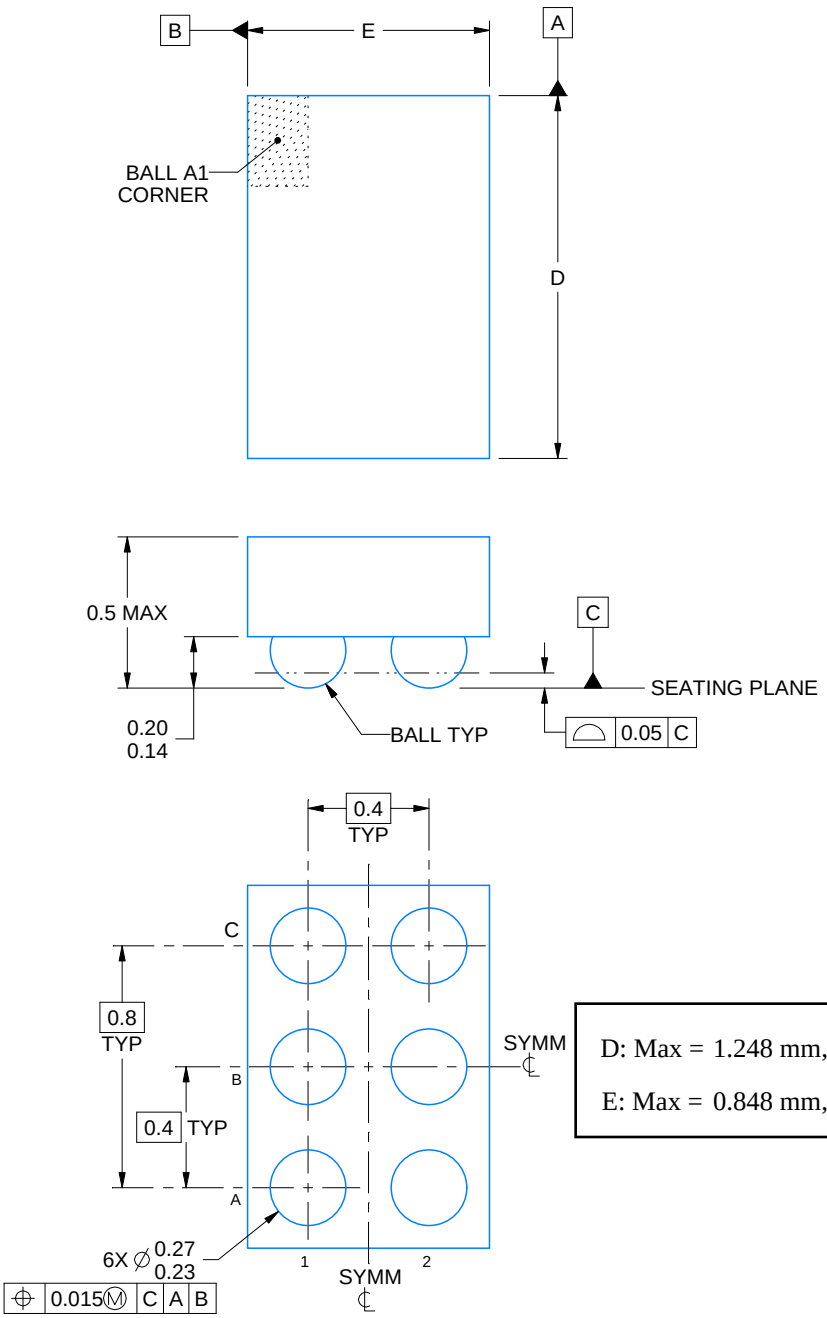

NOTES:

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.

EXAMPLE BOARD LAYOUT

YBG0006

DSBGA - 0.5 mm max height

DIE SIZE BALL GRID ARRAY

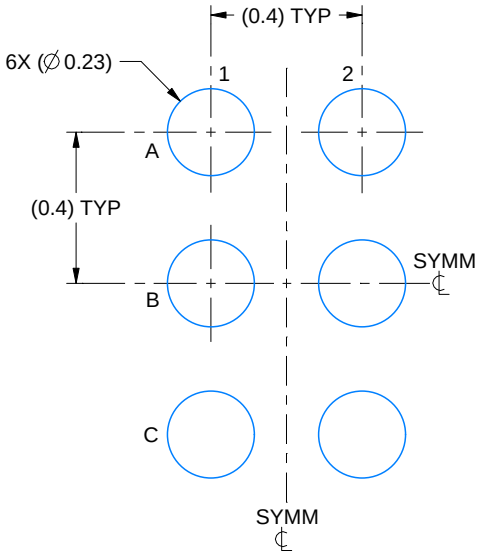

LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE: 50X

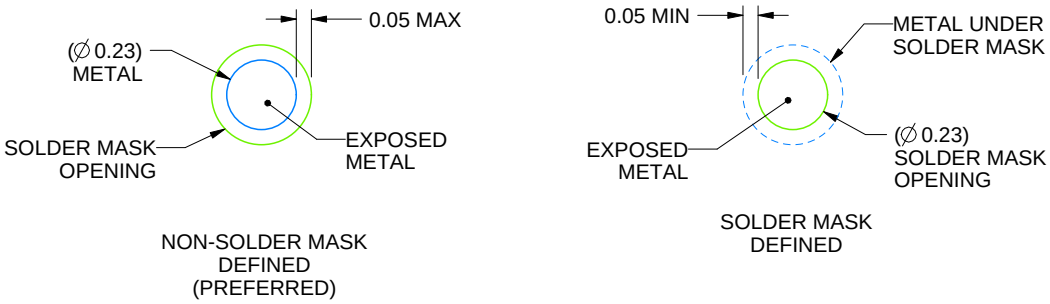

SOLDER MASK DETAILS
NOT TO SCALE

4224328/A 05/2018

NOTES: (continued)

3. Final dimensions may vary due to manufacturing tolerance considerations and also routing constraints.
   See Texas Instruments Literature No. SNVA009 (www.ti.com/lit/snva009).

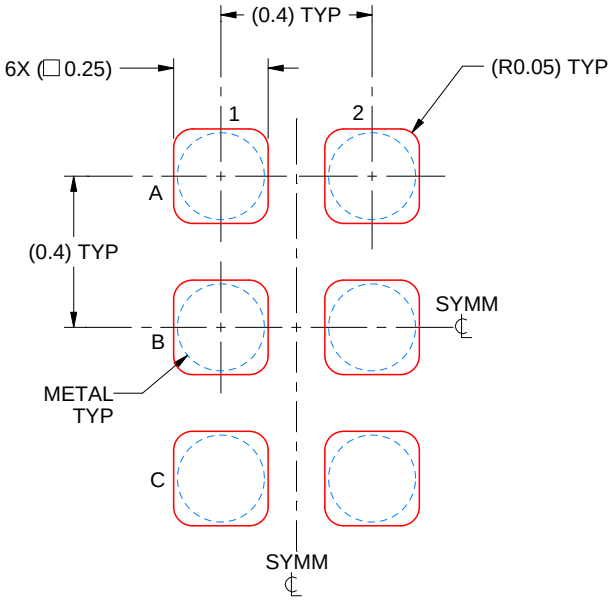

SOLDER PASTE EXAMPLE
BASED ON 0.1 mm THICK STENCIL
SCALE: 50X

4224328/A 05/2018

NOTES: (continued)

4. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release.

重要通知和免责声明

TI“按原样”提供技术和可靠性数据（包括数据表）、设计资源（包括参考设计）、应用或其他设计建议、网络工具、安全信息和其他资源，不保证没有瑕疵且不做出任何明示或暗示的担保，包括但不限于对适销性、与某特定用途的适用性或不侵犯任何第三方知识产权的暗示担保。

这些资源可供使用 TI 产品进行设计的熟练开发人员使用。您将自行承担以下全部责任：(1) 针对您的应用选择合适的 TI 产品，(2) 设计、验证并测试您的应用，(3) 确保您的应用满足相应标准以及任何其他安全、安保法规或其他要求。

这些资源如有变更，恕不另行通知。TI 授权您仅可将这些资源用于研发本资源所述的 TI 产品的相关应用。严禁以其他方式对这些资源进行复制或展示。您无权使用任何其他 TI 知识产权或任何第三方知识产权。对于因您对这些资源的使用而对 TI 及其代表造成的任何索赔、损害、成本、损失和债务，您将全额赔偿，TI 对此概不负责。

TI 提供的产品受 TI 销售条款)、TI 通用质量指南 或 ti.com 上其他适用条款或 TI 产品随附的其他适用条款的约束。TI 提供这些资源并不会扩展或以其他方式更改 TI 针对 TI 产品发布的适用的担保或担保免责声明。 除非德州仪器 (TI) 明确将某产品指定为定制产品或客户特定产品，否则其产品均为按确定价格收入目录的标准通用器件。

TI 反对并拒绝您可能提出的任何其他或不同的条款。

版权所有 © 2025，德州仪器 (TI) 公司

最后更新日期：2025 年 10 月