



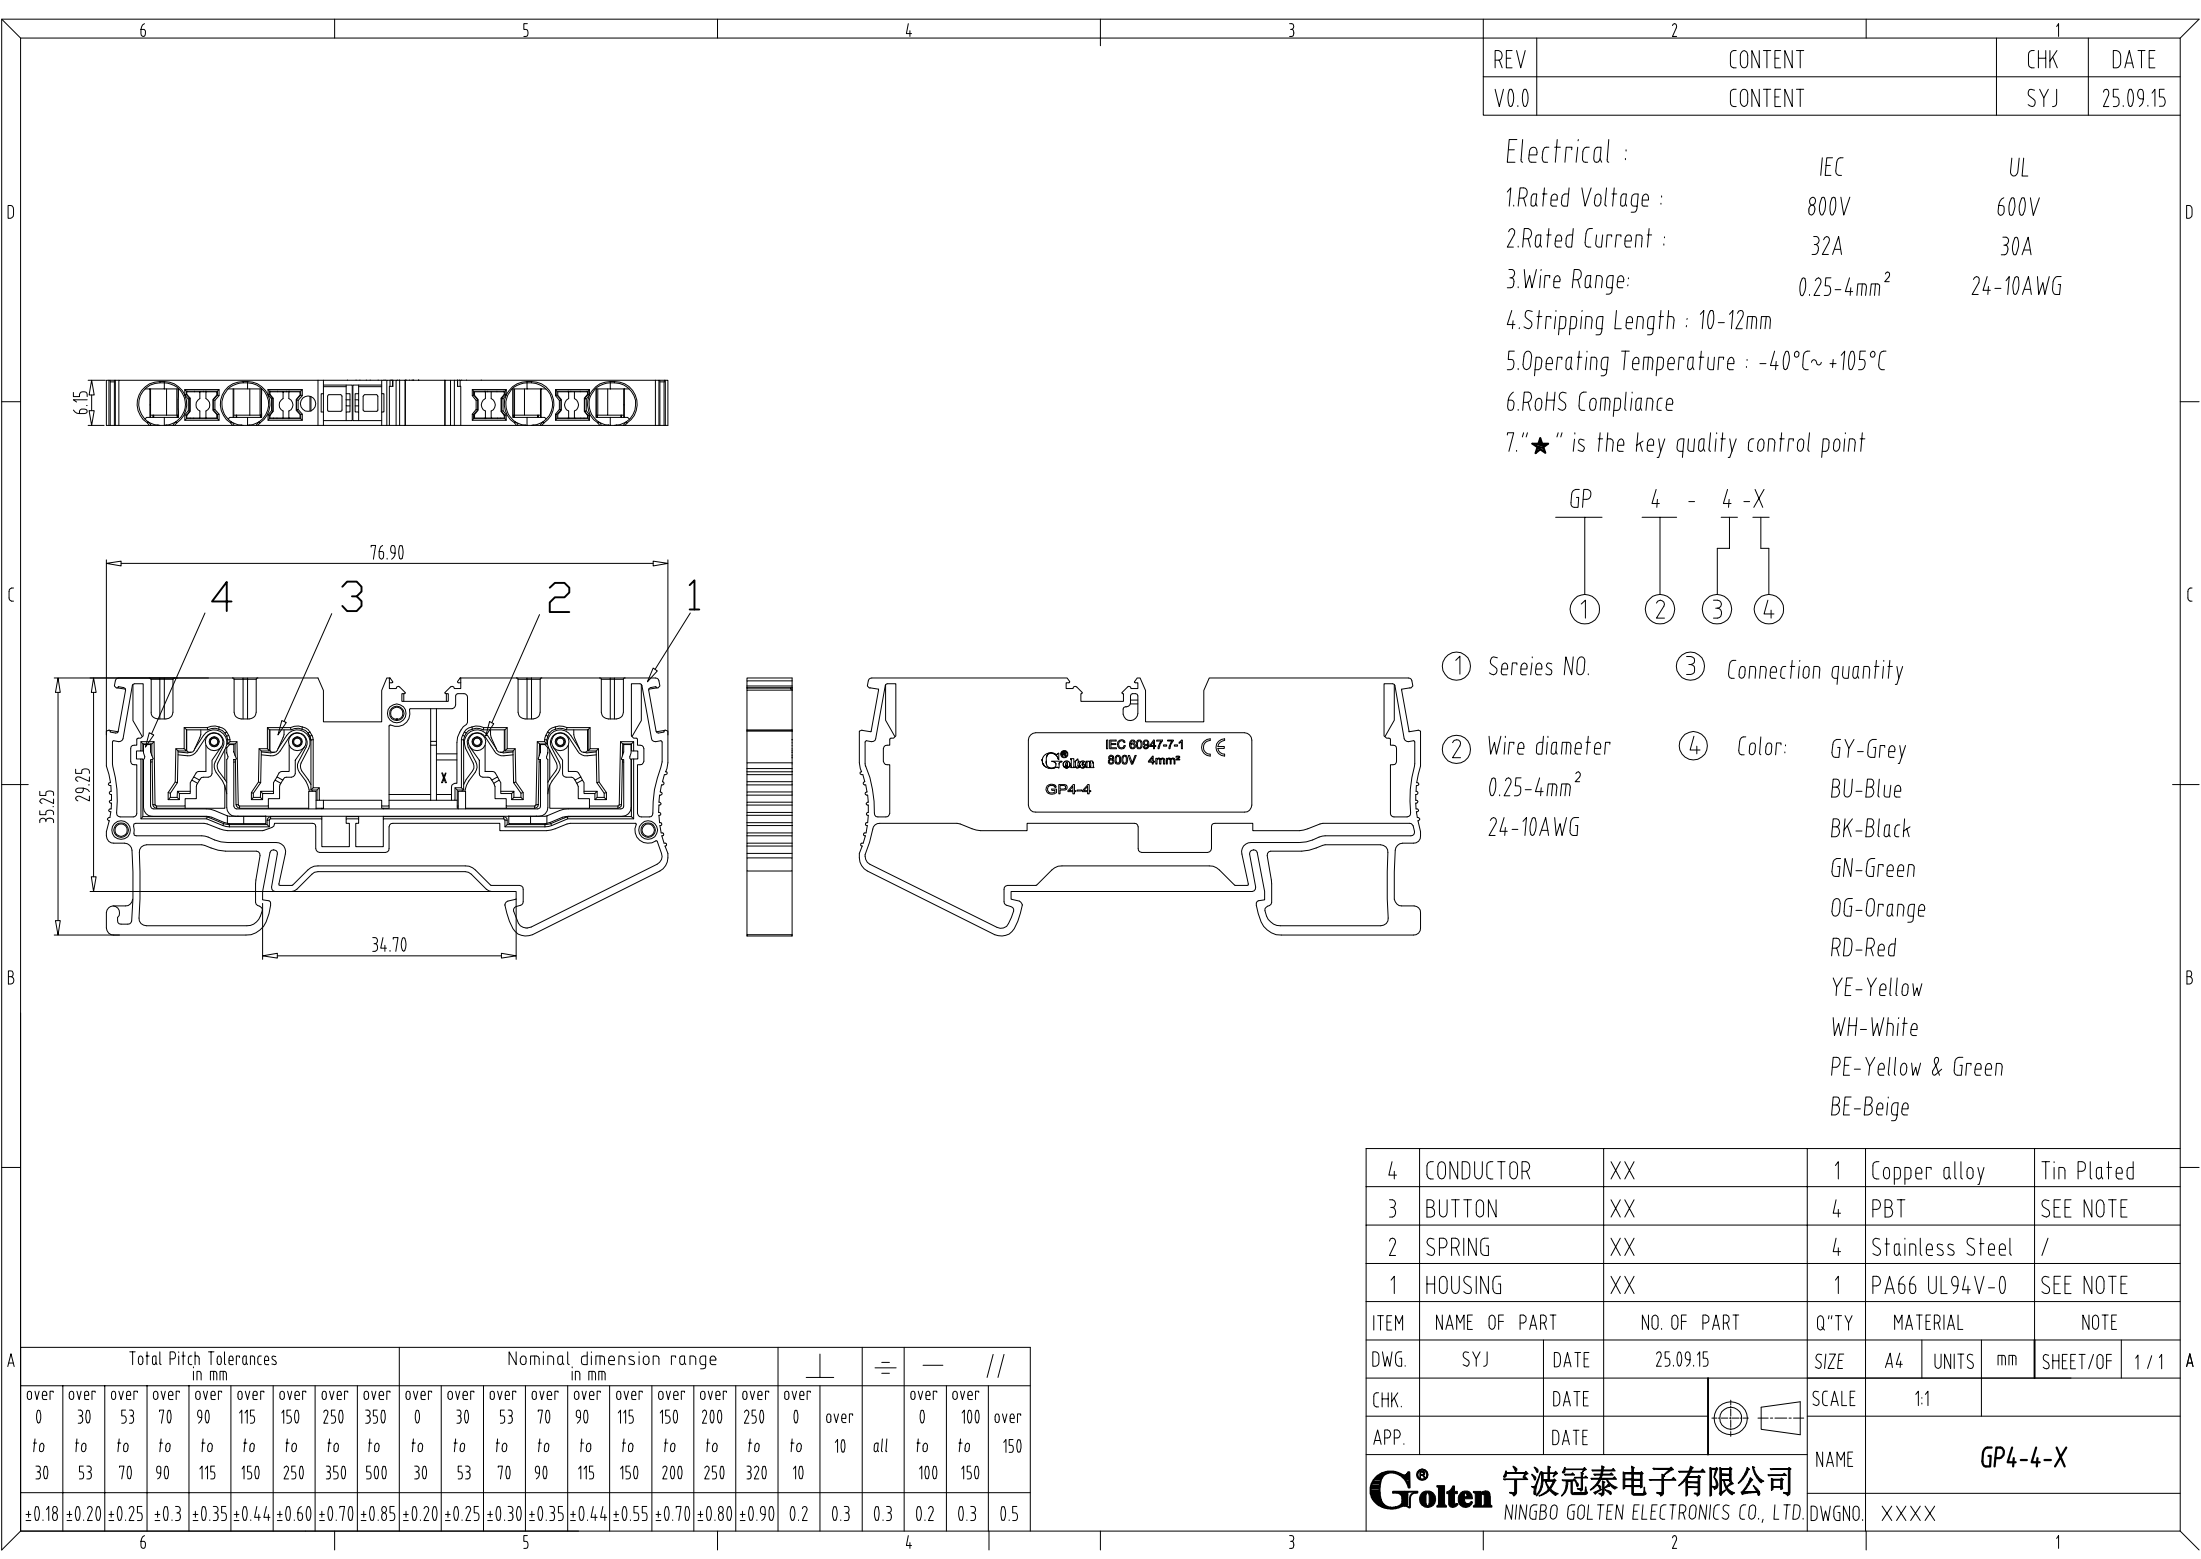

REV	CONTENT	CHK	DATE
V0.0	CONTENT	SYJ	25.09.15

Electrical :

	IEC	UL
1.Rated Voltage :	800V	600V
2.Rated Current :	32A	30A
3.Wire Range:	0.25-4mm ²	24-10AWG
4.Stripping Length :	10-12mm	
5.Operating Temperature :	-40°C~+105°C	
6.RoHS Compliance		
7."★" is the key quality control point		



- ① Sereies NO.
- ② Wire diameter
0.25-4mm²
24-10AWG
- ③ Connection quantity
- ④ Color:
GY-Grey
BU-Blue
BK-Black
GN-Green
OG-Orange
RD-Red
YE-Yellow
WH-White
PE-Yellow & Green
BE-Beige

4	CONDUCTOR	XX	1	Copper alloy	Tin Plated
3	BUTTON	XX	4	PBT	SEE NOTE
2	SPRING	XX	4	Stainless Steel	/
1	HOUSING	XX	1	PA66 UL94V-0	SEE NOTE
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTE
DWG.	SYJ	DATE	25.09.15	SIZE	A4 UNITS mm SHEET/OF 1 / 1
CHK.		DATE		SCALE	1:1
APP.		DATE		NAME	GP4-4-X
Grolten 宁波冠泰电子有限公司 NINGBO GOLTEN ELECTRONICS CO., LTD.				DWGNO.	XXXX