



2		1	
REV	CONTENT	CHK	DATE
V0.0	CONTENT	SYJ	25.09.17

Electrical :	UL	IEC
1.Rated Voltage :	/ V	/ V
2.Rated Current :	/ A	/ A
3.Wire Range:	22-10AWG	0.5-4mm ²
4.Torque Value :	M3 0.65 N.M	6 Lb.in
5.Stripping Length :	8-9mm	
6.Operating Temperature :	-40°C~ +105°C	
7.RoHS Compliance		
8."★" is the key quality control point		

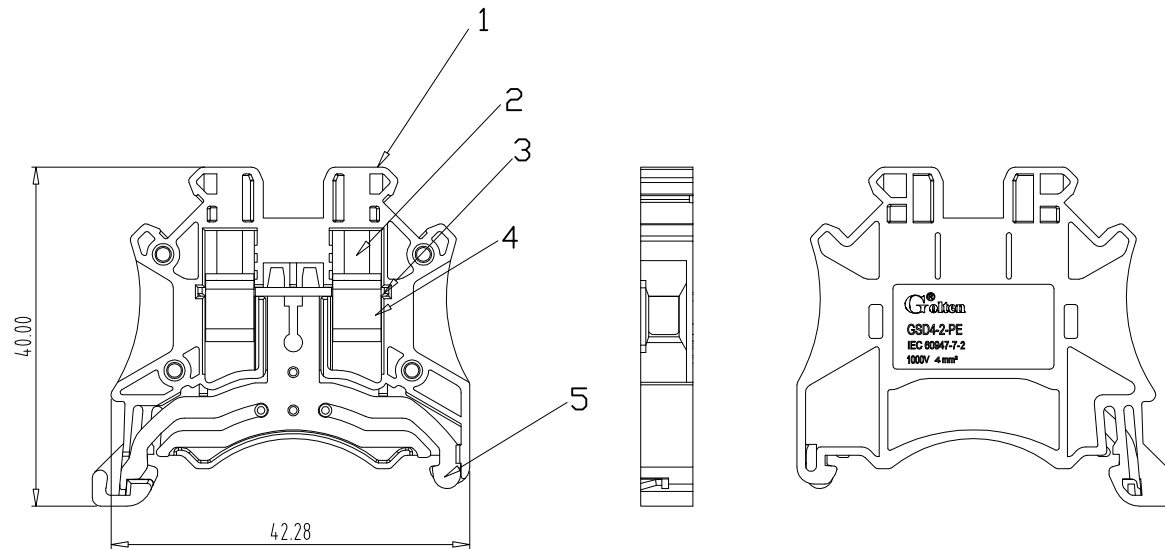

① Series NO. ③ Connection quantity

② Wire diameter ④ Color: PE-Yellow & Green
0.5-4mm²
22-10AWG

5	Grounding		XX		1	Copper alloy		Tin Plated		
4	Cage		XX		2	Steel		Zn Plated		
3	CONDUCTOR		XX		1	Copper alloy		Tin Plated		
2	Screw		XX		2	Steel		Zn Plated		
1	HOUSING		XX		1	PA66 UL94V-0		SEE NOTE		
ITEM	NAME OF PART		NO. OF PART		Q"TY	MATERIAL		NOTE		
DWG.	SYJ	DATE	25.09.17		SIZE	A4	UNITS	mm	SHEET/OF 1 / 1	
CHK.		DATE			SCALE	1:1				
APP.		DATE			NAME	GSD4-2-PE				
 宁波冠泰电子有限公司 NINGBO GOLTEN ELECTRONICS CO., LTD.					DWGNO.	XXXXX				

Total Pitch Tolerances								Nominal dimension range								$\perp$		$\div$	$\text{---} //$					
over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over		
0	30	53	70	90	115	150	250	350	0	30	53	70	90	over	115	150	200	250	0	over		0	100	over
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	10	all	to	to	150
30	53	70	90	115	150	250	350	500	30	53	70	90	115	150	200	250	320	10				100	150	
± 0.18	± 0.20	± 0.25	± 0.3	± 0.35	± 0.44	± 0.60	± 0.70	± 0.85	± 0.20	± 0.25	± 0.30	± 0.35	± 0.44	± 0.55	± 0.70	± 0.80	± 0.90	0.2	0.3	0.3	0.2	0.3	0.5	