


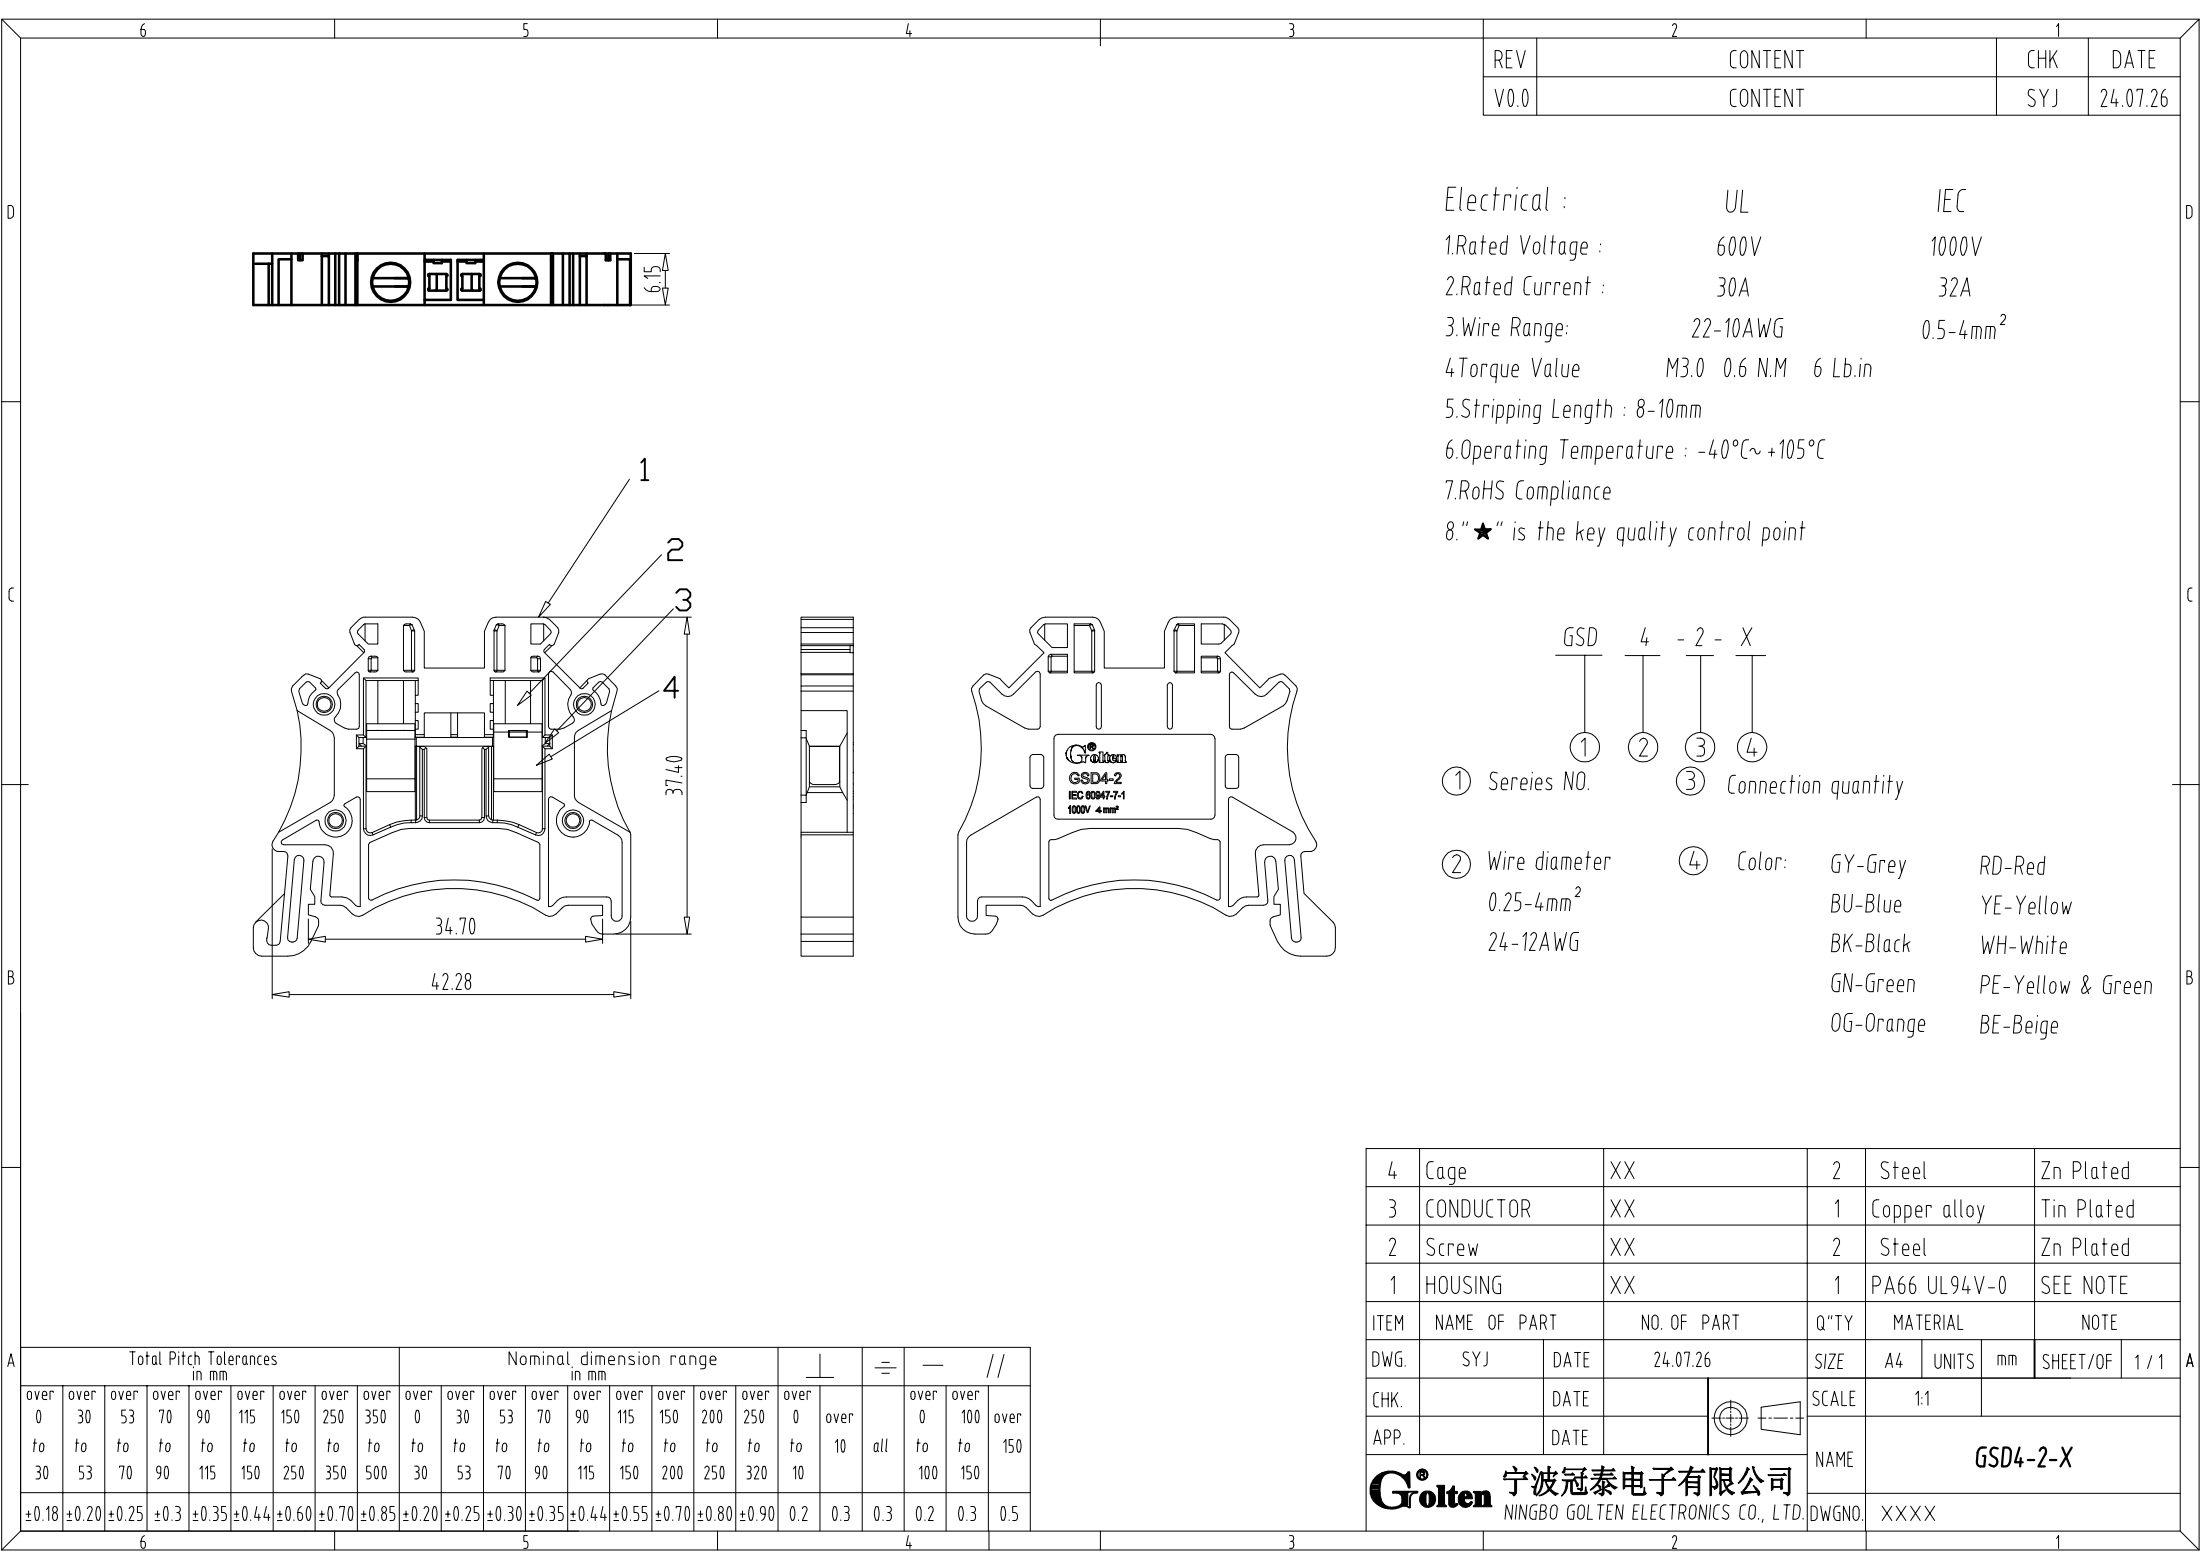

REV	CONTENT	CHK	DATE
V0.0	CONTENT	SYJ	24.07.26

Electrical : UL IEC

1.Rated Voltage : 600V 1000V

2.Rated Current : 30A 32A

3.Wire Range: 22-10AWG 0.5-4mm²

4.Torque Value M3.0 0.6 N.M 6 Lb.in

5.Stripping Length : 8-10mm

6.Operating Temperature : -40°C~+105°C

7.RoHS Compliance

8."★" is the key quality control point

GSD 4 - 2 - X

① ② ③ ④

① Series NO. ③ Connection quantity

② Wire diameter ④ Color: GY-Grey RD-Red

 BU-Blue YE-Yellow

 BK-Black WH-White

 GN-Green PE-Yellow & Green

 OG-Orange BE-Beige

4	Cage	XX	2	Steel	Zn Plated
3	CONDUCTOR	XX	1	Copper alloy	Tin Plated
2	Screw	XX	2	Steel	Zn Plated
1	HOUSING	XX	1	PA66 UL94V-0	SEE NOTE
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTE
DWG.	SYJ	DATE	24.07.26	SIZE	A4 UNITS mm SHEET/OF 1 / 1
CHK.		DATE		SCALE	1:1
APP.		DATE		NAME	GSD4-2-X
Golten 宁波冠泰电子有限公司				DWGNO.	XXXX
NINGBO GOLTEN ELECTRONICS CO., LTD.					