


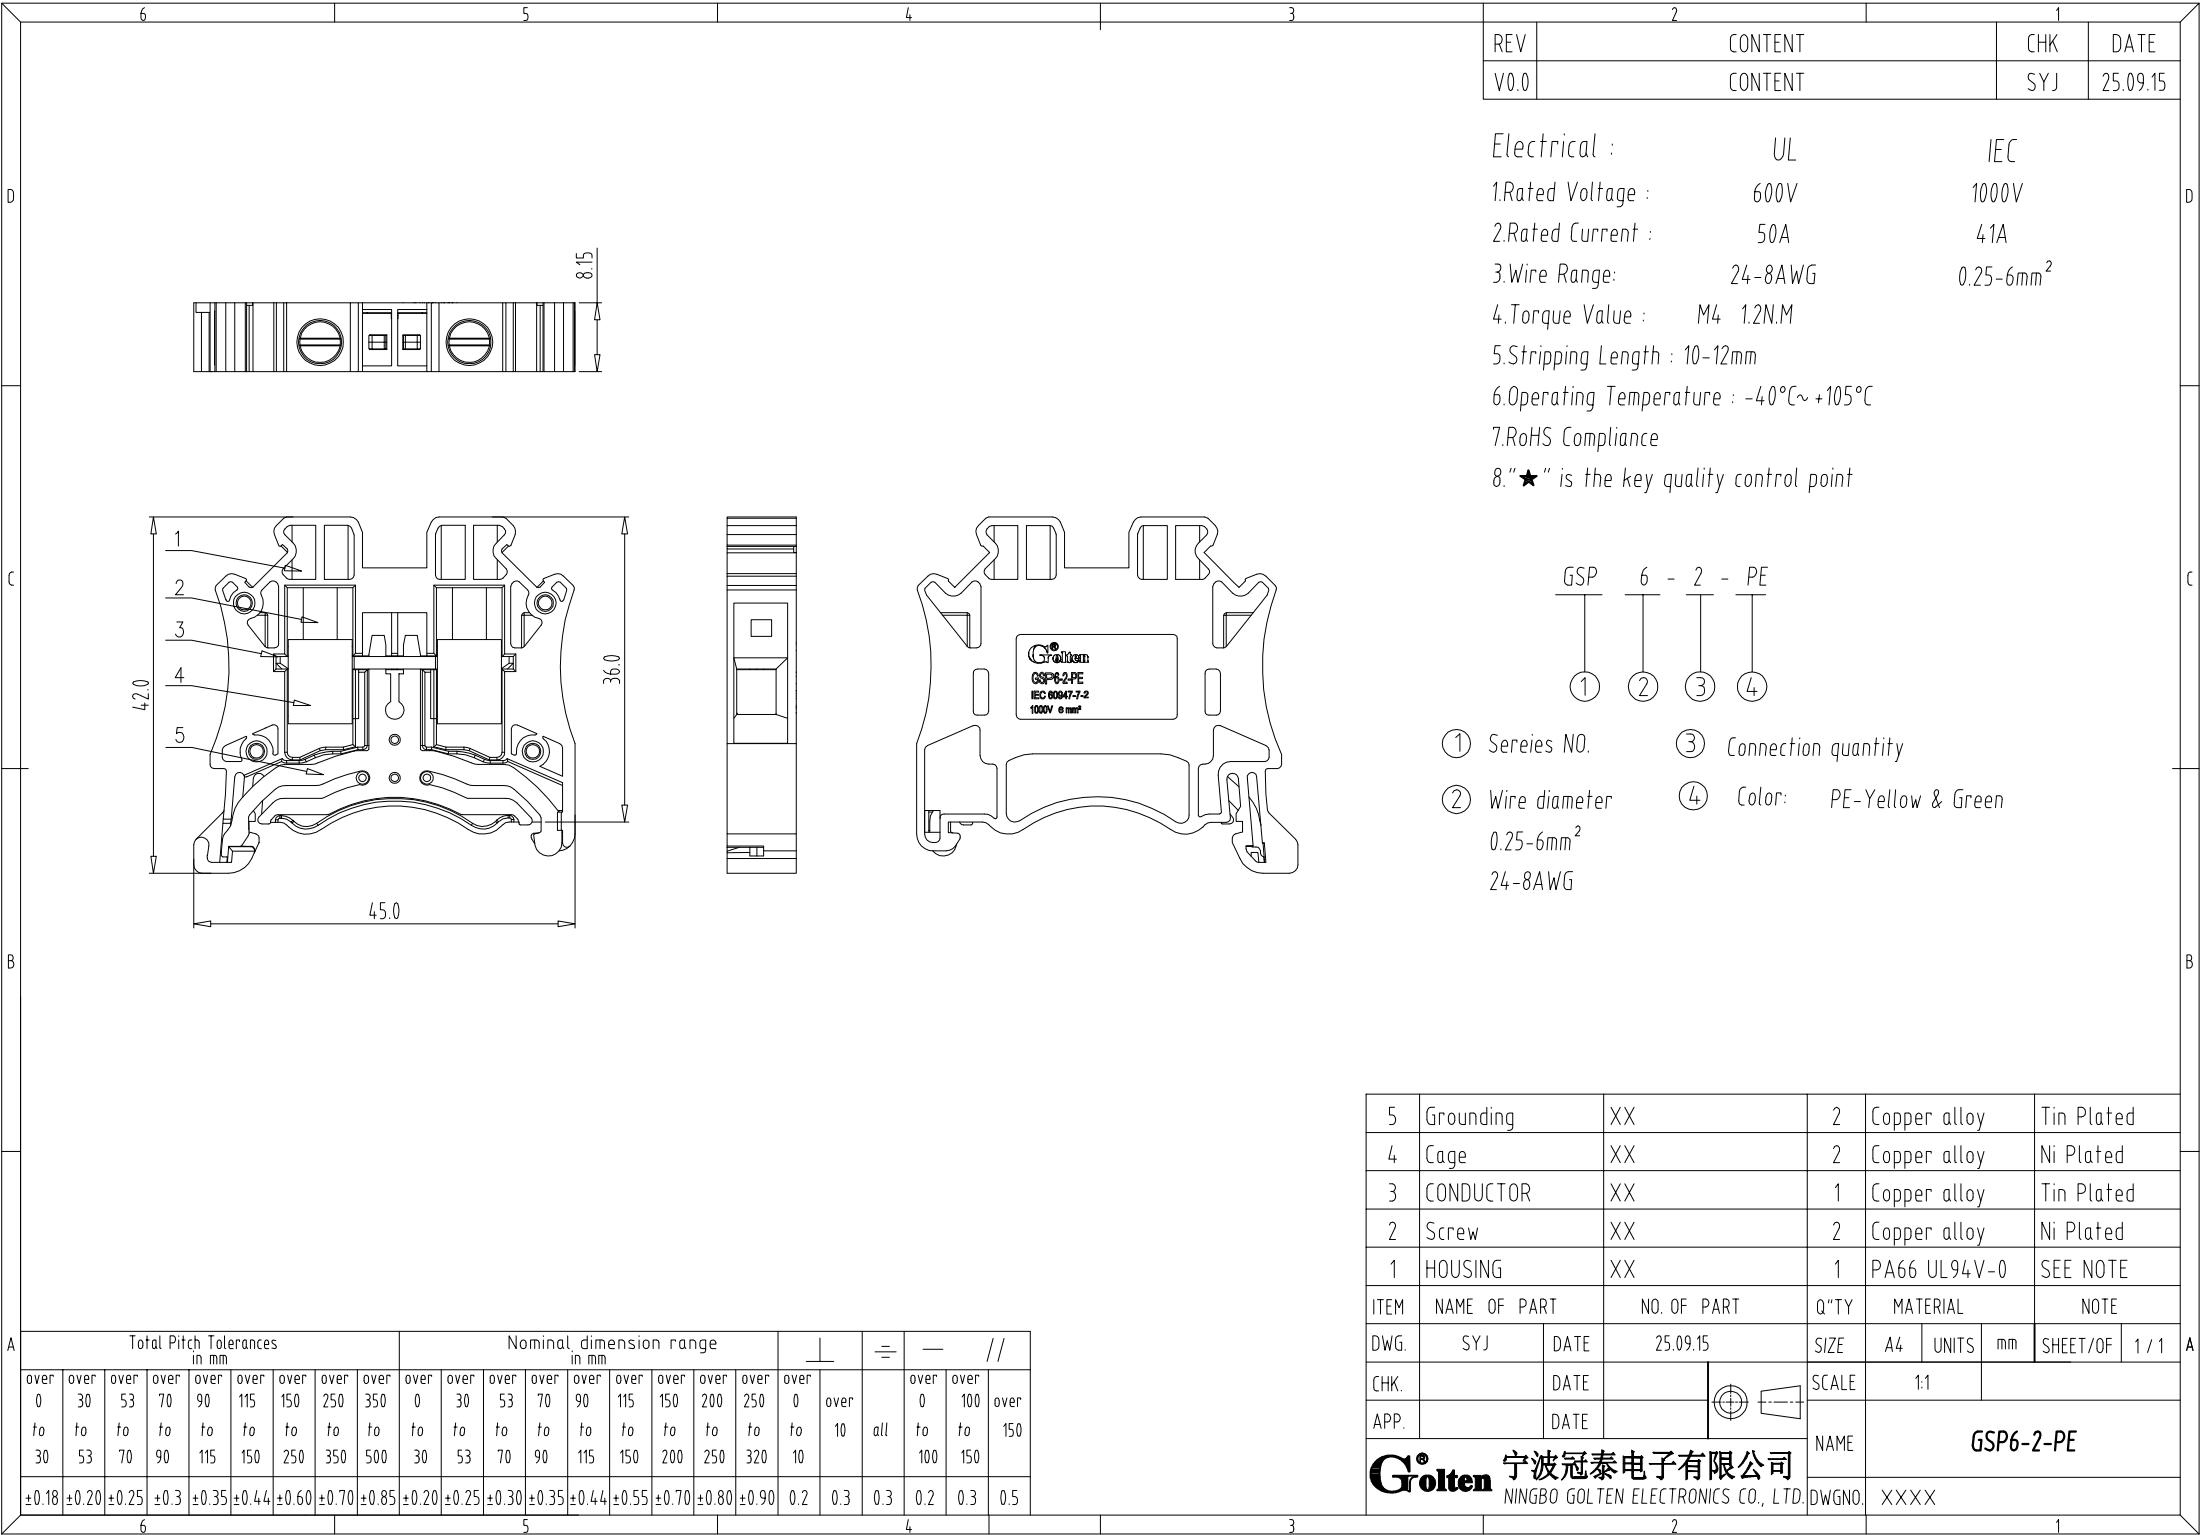

REV	CONTENT	CHK	DATE
V0.0	CONTENT	SYJ	25.09.15

Electrical : UL IEC

1.Rated Voltage : 600V 1000V

2.Rated Current : 50A 41A

3.Wire Range: 24-8AWG 0.25-6mm²


4.Torque Value : M4 1.2N.M

5.Stripping Length : 10-12mm

6.Operating Temperature : -40°C~+105°C

7.RoHS Compliance

8."★" is the key quality control point



- ① Sereies NO.
- ② Wire diameter 0.25-6mm² 24-8AWG
- ③ Connection quantity
- ④ Color: PE-Yellow & Green

5	Grounding	XX	2	Copper alloy	Tin Plated
4	Cage	XX	2	Copper alloy	Ni Plated
3	CONDUCTOR	XX	1	Copper alloy	Tin Plated
2	Screw	XX	2	Copper alloy	Ni Plated
1	HOUSING	XX	1	PA66 UL94V-0	SEE NOTE
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTE
DWG.	SYJ	DATE	25.09.15	SIZE	A4 UNITS mm SHEET/OF 1 / 1
CHK.		DATE		SCALE	1:1
APP.		DATE		NAME	GSP6-2-PE
Grolten 宁波冠泰电子有限公司 NINGBO GOLTEN ELECTRONICS CO., LTD.				DWGNO.	XXXX