


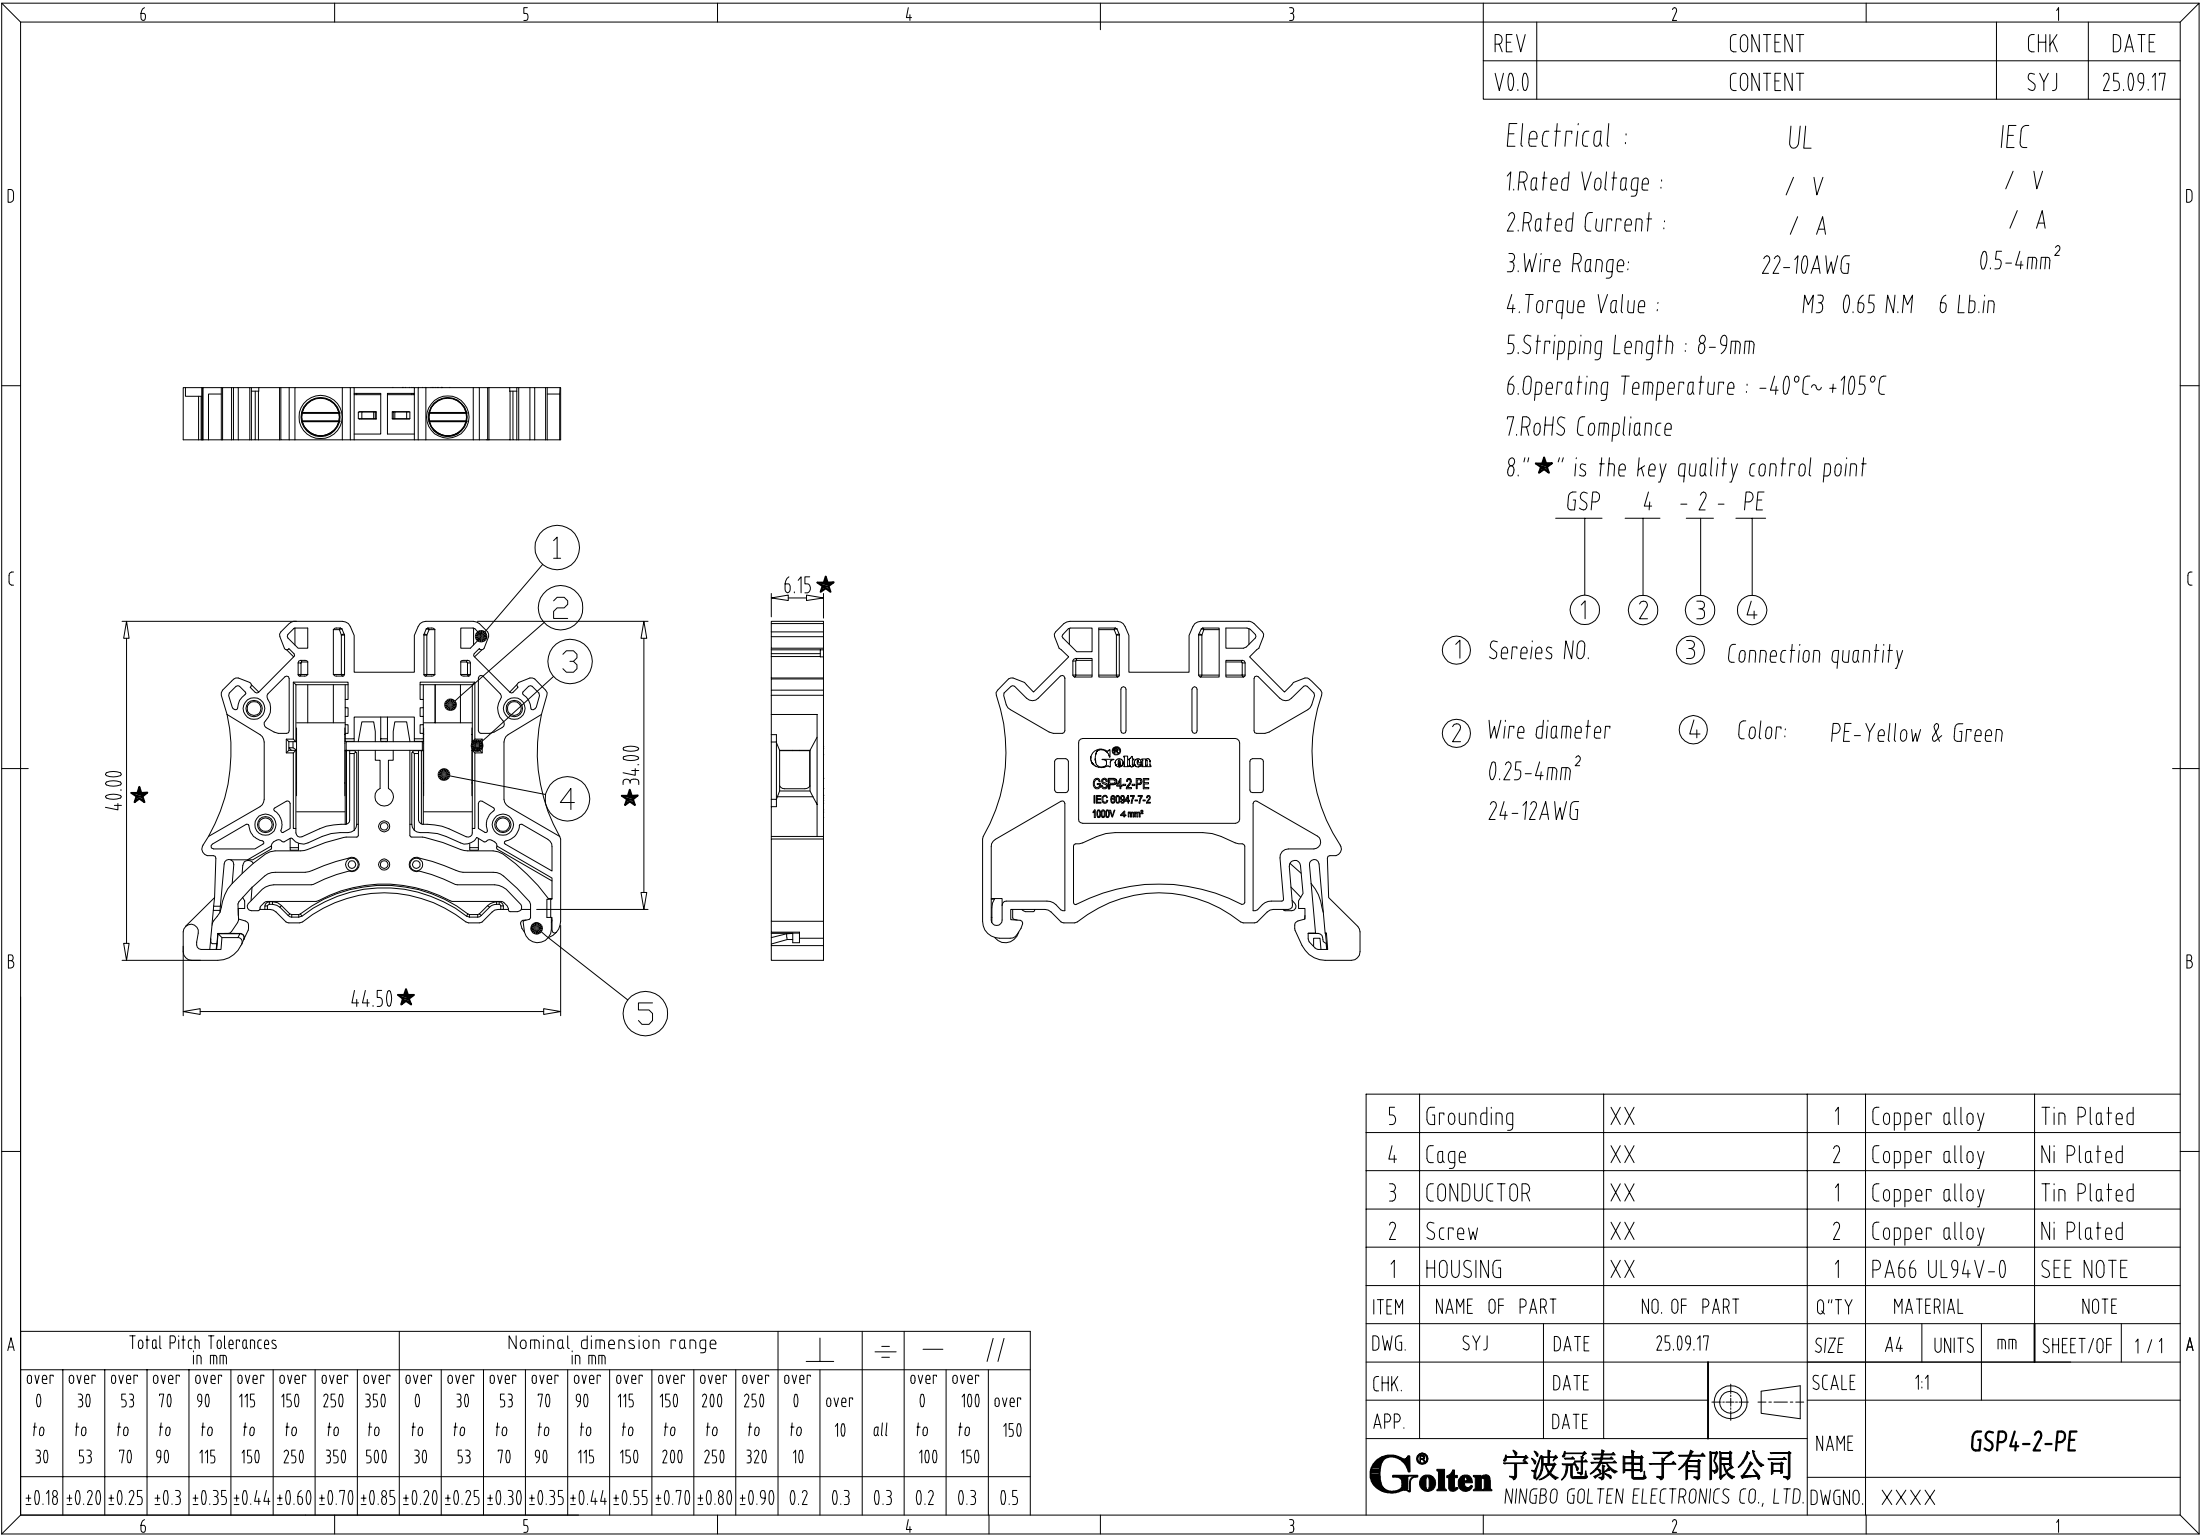

REV	CONTENT	CHK	DATE
V0.0	CONTENT	SYJ	25.09.17

Electrical : UL IEC
1.Rated Voltage : / V / V
2.Rated Current : / A / A
3.Wire Range: 22-10AWG 0.5-4mm²
4.Torque Value : M3 0.65 N.M 6 Lb.in
5.Stripping Length : 8-9mm
6.Operating Temperature : -40°C~+105°C
7.RoHS Compliance
8."★" is the key quality control point

- GSP

4

- 2 -

PE

①

②

③

④
- ① Sereies NO.
- ③ Connection quantity
- ② Wire diameter
0.25-4mm²
24-12AWG
- ④ Color: PE-Yellow & Green

5	Grounding	XX	1	Copper alloy	Tin Plated
4	Cage	XX	2	Copper alloy	Ni Plated
3	CONDUCTOR	XX	1	Copper alloy	Tin Plated
2	Screw	XX	2	Copper alloy	Ni Plated
1	HOUSING	XX	1	PA66 UL94V-0	SEE NOTE
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTE
DWG.	SYJ	DATE	25.09.17	SIZE	A4 UNITS mm SHEET/OF 1 / 1
CHK.		DATE		SCALE	1:1
APP.		DATE		NAME	GSP4-2-PE
Grolten 宁波冠泰电子有限公司 NINGBO GOLTEN ELECTRONICS CO., LTD.				DWGNO.	XXXX