



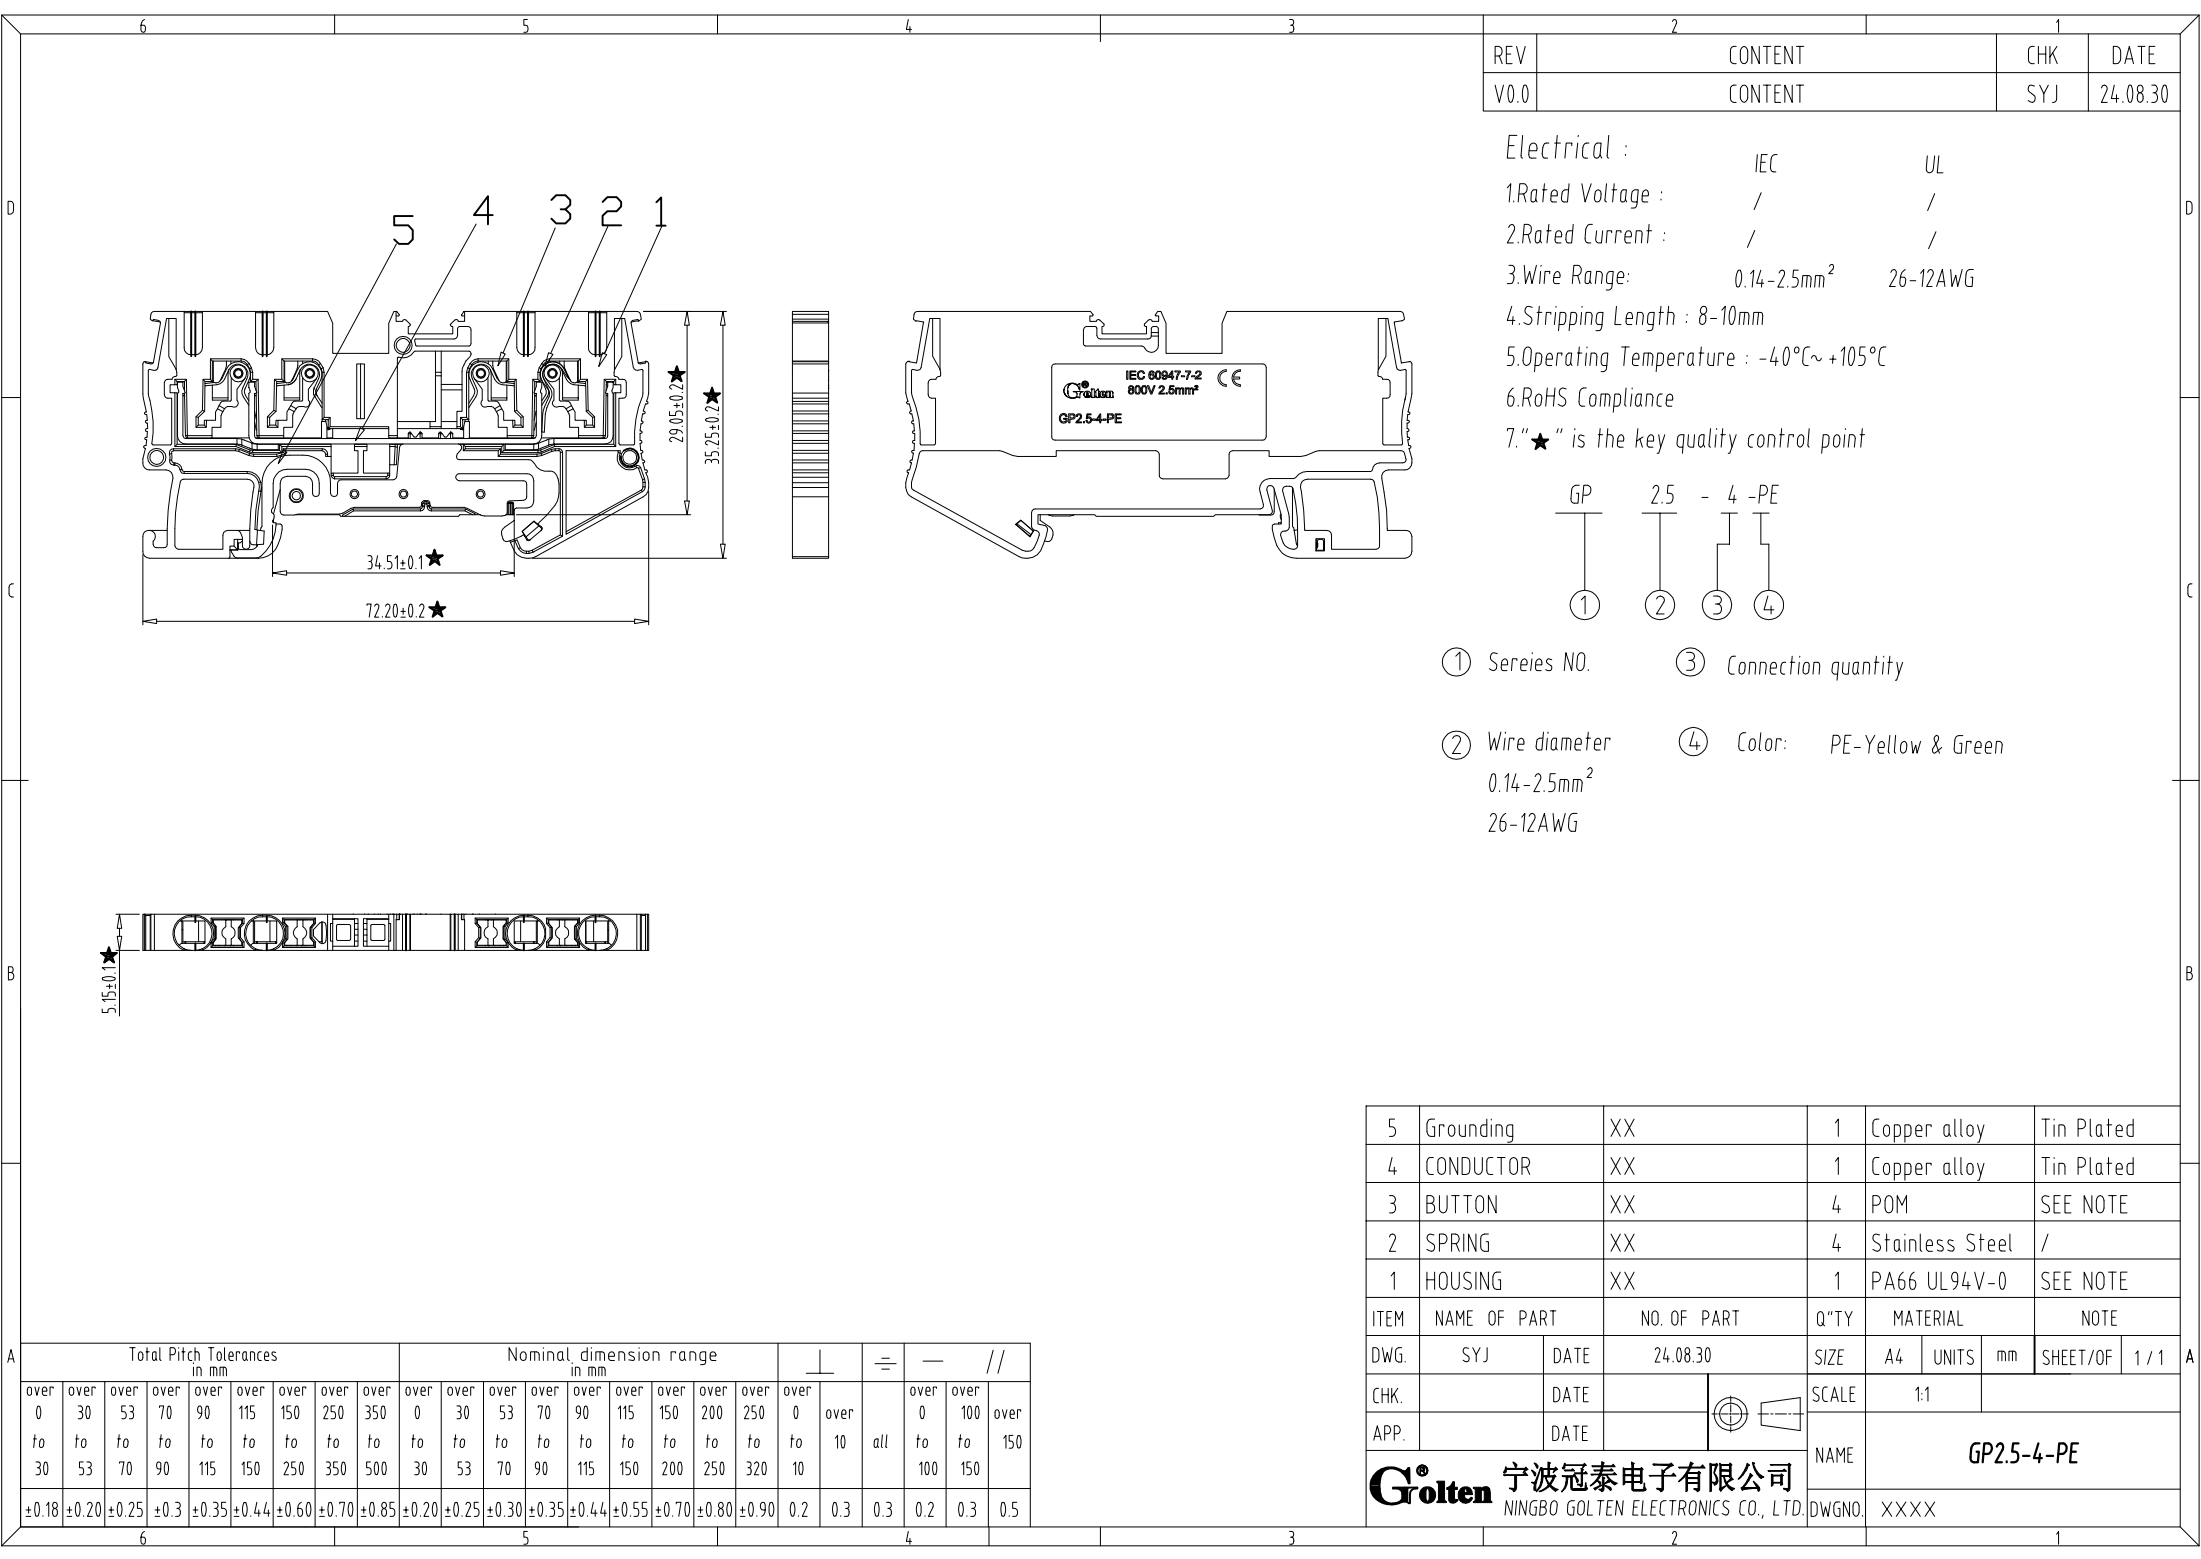

2		1	
REV	CONTENT	CHK	DATE
V0.0	CONTENT	SYJ	24.08.30

Electrical :

	IEC	UL
1.Rated Voltage :	/	/
2.Rated Current :	/	/
3.Wire Range:	0.14-2.5mm ²	26-12AWG
4.Stripping Length :	8-10mm	
5.Operating Temperature :	-40°C~+105°C	
6.RoHS Compliance		
7."★" is the key quality control point		



- ① Series NO.
- ② Wire diameter
0.14-2.5mm²
26-12AWG
- ③ Connection quantity
- ④ Color: PE-Yellow & Green

5	Grounding	XX	1	Copper alloy	Tin Plated					
4	CONDUCTOR	XX	1	Copper alloy	Tin Plated					
3	BUTTON	XX	4	POM	SEE NOTE					
2	SPRING	XX	4	Stainless Steel	/					
1	HOUSING	XX	1	PA66 UL94V-0	SEE NOTE					
ITEM	NAME OF PART		NO. OF PART	Q"TY	MATERIAL	NOTE				
DWG.	SYJ	DATE	24.08.30	SIZE	A4	UNITS	mm	SHEET/OF	1 / 1	
CHK.		DATE			SCALE	1:1				
APP.		DATE			NAME	GP2.5-4-PE				
 宁波冠泰电子有限公司				DWGNO.	XXXX					
	2			1						