



小型波动开关
小型带灯波动开关

Miniature Rocker Switch

Miniature Illuminated Rocker Switch

MRS Series
MIRS Series



RoHS

型号说明 Ordering Information

MRS-102A-2C7-R/B

基座颜色 Base color
盖帽颜色 Cap color
盖帽标记 Cap marking
产品序号 Product order
规格 Rating
电路特性 Circuitry trait
刀数 Poles
小型带灯波动开关 Miniature Illuminated Rocker Switch
小型波动开关 Miniature Rocker Switch

技术特性 Specification

- 1.规格 Rating: ()6A 125VAC;3A 250VAC
(A)10A 125VAC;6A 250VAC
- 2.接触电阻 Contact Resistance:35mΩ max
- 3.绝缘电阻 Insulation Resistance:500VDC 100MΩ min
- 4.耐电压 Dielectric Strength:1500VAC, 1Minute
- 5.操作温度 Operating Temperature:-25°C ~ +85°C
- 6.电气寿命 Electrical Life:10,000 Cycles

电路特性 Circuitry trait

01	ON	—	OFF
02	ON	—	ON
11	(ON)		OFF
12	ON	—	(ON)
03	ON	OFF	ON
13	ON	OFF	(ON)
23	(ON)	OFF	(ON)

():回弹指示 Indicates Momentary

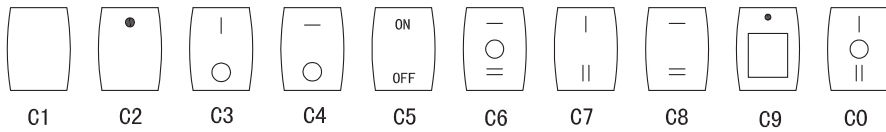
盖帽颜色 Cap color

黑 Black (B)
白 White (W)
红 Red (R)
黄 Yellow (Y)
绿 Green (G)
蓝 Blue (BL)
桔黄 Orange (O)
灰 Gray (GR)


基座颜色 Base color

黑 Black (B)
白 White (W)
灰 Gray (GR)


盖帽标记 Cap marking




防水罩 Water proof cap

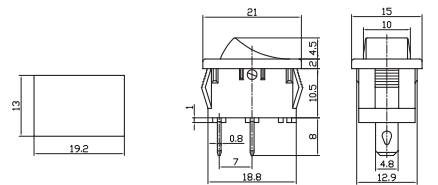

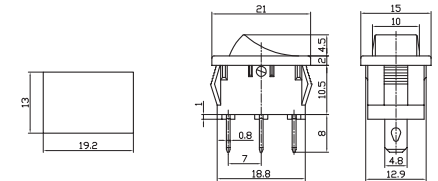MRS-101 ON-OFF
MRS-111 (ON)-OFF
MRS-101A ON-OFF
MRS-111A (ON)-OFF
SPST 2P



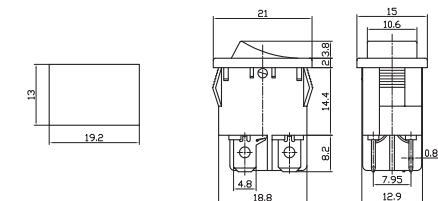MRS-102 MRS-102A ON-ON
MRS-103 MRS-103A ON-OFF-ON
MRS-112 MRS-112A ON-(ON)
SPDT 3P



MRS-2-101-2 ON-OFF
MRS-2-101A-2 ON-OFF
SPST 2P
MIRS-101 ON-OFF
MIRS-101A ON-OFF
SPST 3P
























小型波动开关 小型带灯波动开关

Miniature Rocker Switch

Miniature Illuminated Rocker Switch

MRS Series MIRS Series

	MIRS-201 ON-OFF MIRS-201A ON-OFF MRS-201-2 ON-OFF MRS-201A-2 ON-OFF DPST 4P	  
	MIRS-101-2 ON-OFF 10A 125VAC; 6A 250VAC SPST 3P	  
	MRS-101-2 ON-OFF MRS-101A-2 ON-OFF SPST 2P	  
	MRS-102-2 MRS-102A-2 ON-ON MRS-103-2 MRS-103A-2 ON-OFF-ON MRS-113-2 MRS-113A-2 ON-OFF-(ON) MRS-123-2 MRS-123A-2 (ON)-OFF-(ON) SPDT 3P	  
	MRS-101L-2 ON-OFF MRS-101AL-2 ON-OFF SPST 2P	  
	MRS-102L-2 ON-ON MRS-102AL-2 ON-ON MRS-103L-2 ON-OFF-ON MRS-103AL-2 ON-OFF-ON SPDT 3P	  
	MIRS-101-3+LED ON-OFF 6A 125VAC; 3A 250VAC SPST 4P	  



小型波动开关

小型带灯波动开关

Miniature Rocker Switch

Miniature Illuminated Rocker Switch

MRS Series




MIRS Series



MRS-101A-4 ON-OFF

10A 125VAC; 6A 250VAC

SPST 2P






MRS-102A-4 ON-ON

MRS-103A-4 ON-OFF-ON

10A 125VAC; 6A 250VAC

SPDT 3P






MRS-101-5 ON-OFF

MRS-111-5 (ON)-OFF

10A 125VAC; 6A 250VAC




SPST 2P



MRS-102-6 ON-ON

12A 125VAC; 6A 250VAC




SPDT 3P



MRS-101-7 ON-OFF

10A 125VAC; 6A 250VAC




SPST 2P



MRS-101-8 ON-OFF

13A 125VAC; 6.5A 250VAC

SPST 2P



MIRS-101-8 ON-OFF




SPST 3P

MRS-102-8 ON-ON

MRS-103-8 ON-OFF-ON

13A 125VAC; 6.5A 250VAC

SPDT 3P





小型波动开关
小型带灯波动开关

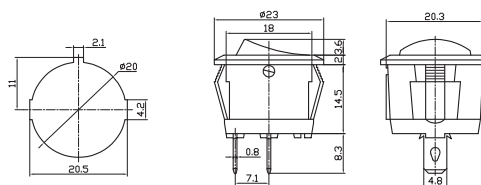
Miniature Rocker Switch

Miniature Illuminated Rocker Switch


MRS Series
MIRS Series




MRS-101-9 ON-OFF
10A 125VAC;6A 250VAC
SPST 2P



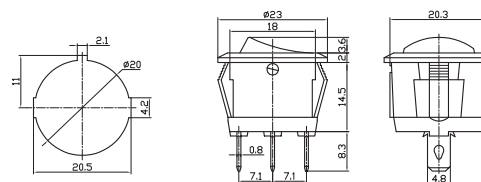
MIRS-101-9 ON-OFF
SPST 3P
MRS-102-9 ON-ON
MRS-103-9 ON-OFF-ON
10A 125VAC;6A 250VAC
SPDT 3P



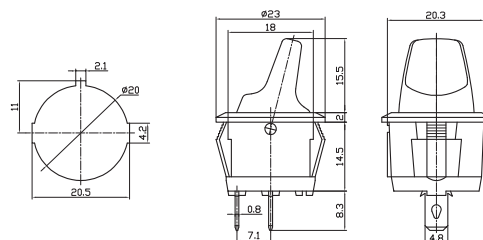
MRS-101-9H ON-OFF
10A 125VAC;6A 250VAC
SPST 2P



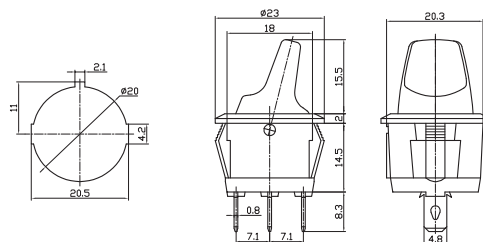
MIRS-101-9H ON-OFF
SPST 3P
MRS-102-9H ON-ON
MRS-103-9H ON-OFF-ON
10A 125VAC;6A 250VAC
SPDT 3P



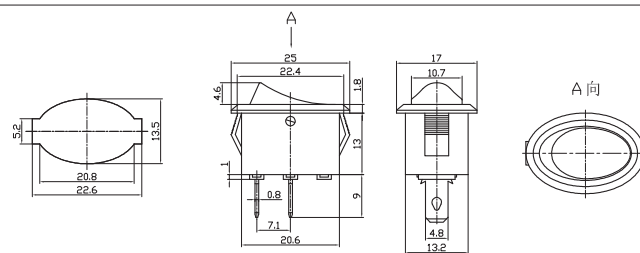
MRS-101-10 ON-OFF
10A 125VAC;6A 250VAC
SPST 2P



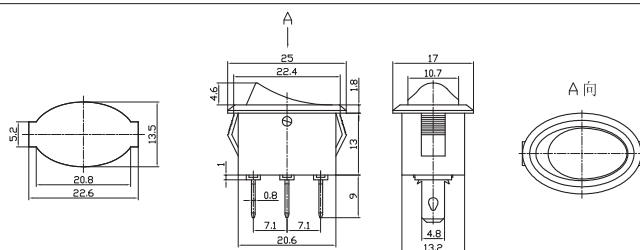MIRS-101-10 ON-OFF
10A 125VAC;6A 250VAC
SPST 3P



MRS-103-12
10A 125VAC;6A 250VAC
MRS-103A-12
16A 125VAC;10A 250VAC
ON-ON-OFF SPDT 3P





小型波动开关
























小型带灯波动开关

Miniature Rocker Switch

Miniature Illuminated Rocker Switch

MRS Series

MIRS Series

	MRS-201 ON-OFF MRS-211 (ON)-OFF MRS-201A ON-OFF MRS-211A (ON)-OFF DPST 4P	  
	MRS-202 ON-ON MRS-203 ON-OFF-ON MRS-202A ON-ON MRS-203A ON-OFF-ON DPDT 6P	  
	MRS-202P ON-ON MRS-203P ON-OFF-ON MRS-202AP ON-ON MRS-203AP ON-OFF-ON DPDT 6P	  
	MRS-2101 ON-OFF MRS-2111 (ON)-OFF MRS-2101A ON-OFF MRS-2111A (ON)-OFF DPST 4P	  
	MRS-2102 ON-ON MRS-2103 ON-OFF-ON MRS-2102A ON-ON MRS-2103A ON-OFF-ON DPDT 6P	  
	MIRS-101AE-111A ON-ON/(ON)-OFF 20A 12VDC DPST 5P	  
	MIRS-2101AE ON-OFF 20A 12VDC DPST 6P	  



小型波动开关 小型带灯波动开关

Miniature Rocker Switch Miniature Illuminated Rocker Switch

MRS Series MIRS Series

	MRS-201-3 ON-OFF DPST 4P L1=3; 8 L2=5.5; 9	
	MRS-202-3 ON-ON MRS-203-3 ON-OFF-ON DPDT 6P L1=3; 8 L2=5.5; 9	
	MIRS-201-4 ON-OFF MRS-201-4 ON-OFF 10A 125VAC;6A 250VAC DPST 4P	
	MIRS-202-4 ON-ON 10A 125VAC;6A 250VAC DPDT 6P	
	MRS-201-5 ON-OFF MRS-211-5 (ON)-OFF 10A 125VAC;6A 250VAC DPST 4P	
	MRS-202-5 ON-ON MRS-203-5 ON-OFF-ON MRS-212-5 (ON)-ON MRS-213-5 (ON)-OFF-ON MRS-223-5 (ON)-OFF-(ON) 10A 125VAC;6A 250VAC DPDT 6P	
	MIRS-101-5 ON-OFF 10A 125VAC;6A 250VAC SPST 3P	